

MX PRO 2

MAIN CHARACTERISTICS

Applications	Street and architectural lighting.
Optic	STE-M/S: Asymmetrical optic for suburban street lighting. STU-M/S: Asymmetrical optic for street, urban and cycle-path lighting. STW: Asymmetrical optic for wide urban and suburban road lighting, specific for wet asphalts. SV: Asymmetrical optic for very narrow urban streets or highway entrance/exit turns. S05/S07: Asymmetrical optic for street, urban and green areas lighting. STA/STA1: Asymmetrical optic for wide urban road and cycle-path lighting. AS: Asymmetrical optics for floodlighting. Colour temperature: 4000K, 3000K, 2700K, 2200K (others in option) CRI ≥ 70 LOR= 100%, DLOR= 100%, ULOR= 0% Photobiological safety class: EXEMPT GROUP LED source efficiency: 185 lm/W @ 140mA, Tj=85°C, 4000K
Insulation class	II, I
Protection degree	IP66/IP67 IK09 total
Dimensions	See the drawing
Weight	max 11kg (without fixing flange)
Exposed surface	Side: 0.038m ² – Top: 0.22m ² SCx 0.256 m ²
Mounting	Mounting with integrated flange
Tilt Angle	See luminaire inclination detail.
LED Modules	Removable / Replaceable.
Gear tray	Removable.
Operating temp.	-40°C / +55°C
Storage temp	-40°C / +80°C
Main reference standards	EN 60598-1, EN 60598-2-3, EN 60598-2-5, IEC 62471, PD EPRS 003 / EN 62722-2-1 2016, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3




ELECTRICAL CHARACTERISTICS

Rated voltage	220+240V 50/60Hz (Standard tolerance +/-10%, other voltages and tolerances upon request)
Power factor	>0,95 (at full load - F, DA, DAC)
Mains connection	Terminal block for cables max section 4mm ²
Surge protection	Up to 12kV With SPD: CL.II: 10kV / 10kV CM/DM CL.I: 12kV / 10kV CM/DM Without SPD: CL.II: 10kV / 6kV CM/DM CL.I: 10kV / 6kV CM/DM
SPD (optional)	12kV-10kA, type 2+3, with LED signal and thermo fuse to disconnect load at the end of life.
Control system (options)	F: Fixed power not dimmable. DA: Automatic dimming (virtual midnight) with default profile. DAC: Custom DA profile. FLC: Constant light flux. DALI: Digital dimming interface DALI. NEMA: Socket 7 pin (ANSI C136.41). ZHAGA: Socket 4 pin (ZHAGA Book 18).
Optical unit lifetime (Tq=25°C)	>100.000hr L90B10 >100.000hr L90, TM-21


MATERIALS

Fixing	AISI 304 stainless steel
Lower frame	Die-cast aluminum UNI EN1706 powder painted.
Upper canopy	
Closure hook	Extruded aluminium with stainless steel spring.
Optic	99.85% aluminum with a surface finish in 99.95% with vacuum-sealed deposition. Aluminum grade class A+ (DIN EN 16268)
Screen	Flat tempered glass, 5mm thickness high transparency.
Cable gland	Metallic M20x1.5 - IP68
Gasket	Polyurethane
Colour	Graphite - Cod. 01

DIMENSIONAL DRAWING

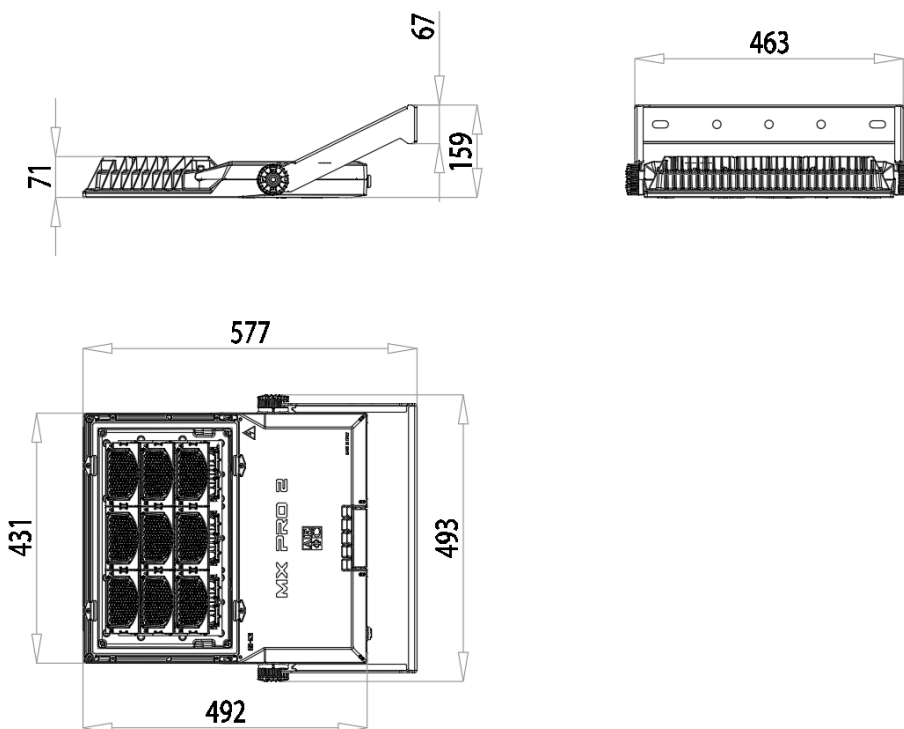


FIXING BRACKET DETAIL

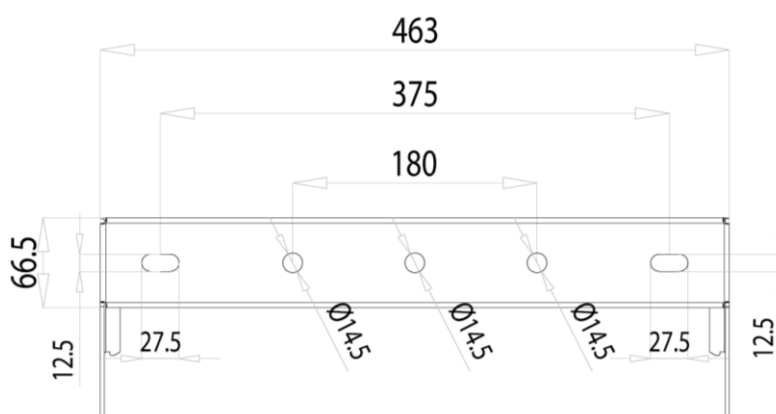

Bracket weight: 1.7kg


LUMINAIRE INCLINATION DETAIL

STANDARD BRACKET INSTALLATION

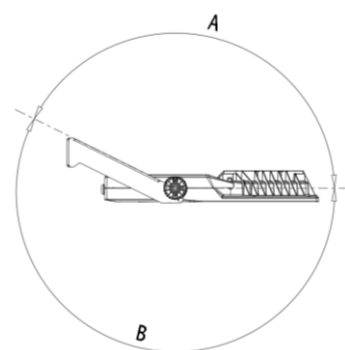

A=140°
B=180°

INVERTED BRACKET INSTALLATION

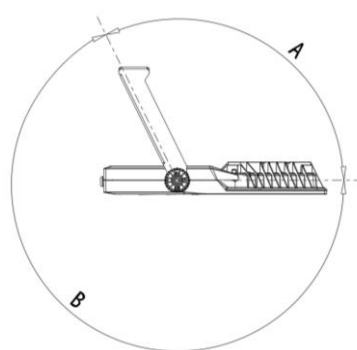

A=90°
B=230°

MX PRO 2 5P5 4000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7040.060-5M		8750	53,4	163	9234	47	50
MX PRO 2 5P5 7040.070-5M		10130	62,2	162	10728	55,1	50
MX PRO 2 5P5 7040.080-5M		11500	71	161	12206	63,3	50
MX PRO 2 5P5 7040.090-5M		12830	79,7	160	13668	71,5	50
MX PRO 2 5P5 7040.100-5M		14150	88,6	159	15115	79,8	50
MX PRO 2 5P5 7040.120-5M		16710	107	156	17962	96,5	50
MX PRO 2 5P5 7040.140-5M		19190	125	153	20748	113	50
MX PRO 2 5P5 7040.160-5M		21580	144	149	23471	130	50
MX PRO 2 5P5 7040.180-5M		23890	164	145	26133	148	50
MX PRO 2 5P5 7040.200-5M		26130	185	141	28732	165	35
MX PRO 2 5P5 7040.060-6M		10500	63,9	164	11081	56,4	50
MX PRO 2 5P5 7040.070-6M		12160	74,3	163	12873	66,1	50
MX PRO 2 5P5 7040.080-6M		13790	84,8	162	14647	75,9	50
MX PRO 2 5P5 7040.090-6M		15390	95,4	161	16402	85,8	50
MX PRO 2 5P5 7040.100-6M		16960	106	160	18138	95,7	50
MX PRO 2 5P5 7040.120-6M		20010	128	156	21555	116	50
MX PRO 2 5P5 7040.140-6M		22940	150	152	24897	136	50
MX PRO 2 5P5 7040.160-6M		25760	173	148	28165	157	50
MX PRO 2 5P5 7040.180-6M		28480	197	144	31359	177	50
MX PRO 2 5P5 7040.200-6M		31090	223	139	34478	198	35
MX PRO 2 5P5 7040.060-7M		12300	74,4	165	12928	65,8	50
MX PRO 2 5P5 7040.070-7M		14250	87	163	15019	77,2	50
MX PRO 2 5P5 7040.080-7M	STA	16140	99,6	162	17088	88,6	50
MX PRO 2 5P5 7040.090-7M	STA1	17990	112	160	19135	100	50
MX PRO 2 5P5 7040.100-7M	STU-S	19780	125	158	21161	112	50
MX PRO 2 5P5 7040.120-7M	S05	23240	151	153	25147	135	50
MX PRO 2 5P5 7040.140-7M	S07	26560	177	150	29047	159	50
MX PRO 2 5P5 7040.160-7M	STE-S	29760	204	145	32860	183	50
MX PRO 2 5P5 7040.180-7M		32880	231	142	36586	207	35
MX PRO 2 5P5 7040.200-7M		35940	259	138	40225	231	35
MX PRO 2 5P5 7040.060-8M		14080	86,5	162	14775	75,2	50
MX PRO 2 5P5 7040.070-8M		16300	100	163	17164	88,2	50
MX PRO 2 5P5 7040.080-8M		18450	114	161	19529	101	50
MX PRO 2 5P5 7040.090-8M		20530	128	160	21869	114	50
MX PRO 2 5P5 7040.100-8M		22550	142	158	24184	128	50
MX PRO 2 5P5 7040.120-8M		26430	171	154	28740	154	50
MX PRO 2 5P5 7040.140-8M		30130	200	150	33197	181	50
MX PRO 2 5P5 7040.160-8M		33710	231	145	37554	209	50
MX PRO 2 5P5 7040.180-8M		37210	263	141	41812	236	35
MX PRO 2 5P5 7040.200-8M		40690	297	137	45971	264	35
MX PRO 2 5P5 7040.060-9M		15840	97,6	162	16622	84,6	50
MX PRO 2 5P5 7040.070-9M		18340	113	162	19310	99,2	50
MX PRO 2 5P5 7040.080-9M		20760	129	160	21970	114	50
MX PRO 2 5P5 7040.090-9M		23100	144	160	24603	129	50
MX PRO 2 5P5 7040.100-9M		25370	160	158	27207	144	50
MX PRO 2 5P5 7040.120-9M		29730	192	154	32332	174	50
MX PRO 2 5P5 7040.140-9M		33900	225	150	37346	204	50
MX PRO 2 5P5 7040.160-9M		37930	259	146	42248	235	35
MX PRO 2 5P5 7040.180-9M		41870	296	141	47039	266	35
MX PRO 2 5P5 7040.200-9M		45780	334	137	51718	298	35
MX PRO 2 5P5 7040.060-5M		8940	53,4	167	9234	47	50
MX PRO 2 5P5 7040.070-5M		10360	62,2	166	10728	55,1	50
MX PRO 2 5P5 7040.080-5M		11750	71	165	12206	63,3	50
MX PRO 2 5P5 7040.090-5M		13120	79,7	164	13668	71,5	50
MX PRO 2 5P5 7040.100-5M		14470	88,6	163	15115	79,8	50
MX PRO 2 5P5 7040.120-5M		17100	107	159	17962	96,5	50
MX PRO 2 5P5 7040.140-5M		19630	125	157	20748	113	50
MX PRO 2 5P5 7040.160-5M		22080	144	153	23471	130	50
MX PRO 2 5P5 7040.180-5M	SV	24440	164	149	26133	148	50
MX PRO 2 5P5 7040.200-5M	STU-M	26720	185	144	28732	165	35
MX PRO 2 5P5 7040.060-6M	STE-M	10740	63,9	168	11081	56,4	50
MX PRO 2 5P5 7040.070-6M	STW	12440	74,3	167	12873	66,1	50
MX PRO 2 5P5 7040.080-6M		14110	84,8	166	14647	75,9	50
MX PRO 2 5P5 7040.090-6M		15750	95,4	165	16402	85,8	50
MX PRO 2 5P5 7040.100-6M		17350	106	163	18138	95,7	50
MX PRO 2 5P5 7040.120-6M		20460	128	159	21555	116	50
MX PRO 2 5P5 7040.140-6M		23460	150	156	24897	136	50
MX PRO 2 5P5 7040.160-6M		26340	173	152	28165	157	50
MX PRO 2 5P5 7040.180-6M		29120	197	147	31359	177	50
MX PRO 2 5P5 7040.200-6M		31800	223	142	34478	198	35

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 SP5 7040.060-7M		12590	74,4	169	12928	65,8	50
MX PRO 2 SP5 7040.070-7M		14580	87	167	15019	77,2	50
MX PRO 2 SP5 7040.080-7M		16510	99,6	165	17088	88,6	50
MX PRO 2 SP5 7040.090-7M		18400	112	164	19135	100	50
MX PRO 2 SP5 7040.100-7M		20230	125	161	21161	112	50
MX PRO 2 SP5 7040.120-7M		23770	151	157	25147	135	50
MX PRO 2 SP5 7040.140-7M		27160	177	153	29047	159	50
MX PRO 2 SP5 7040.160-7M		30440	204	149	32860	183	50
MX PRO 2 SP5 7040.180-7M		33620	231	145	36586	207	35
MX PRO 2 SP5 7040.200-7M		36760	259	141	40225	231	35
MX PRO 2 SP5 7040.060-8M		14390	86,5	166	14775	75,2	50
MX PRO 2 SP5 7040.070-8M		16670	100	166	17164	88,2	50
MX PRO 2 SP5 7040.080-8M		18870	114	165	19529	101	50
MX PRO 2 SP5 7040.090-8M		20990	128	163	21869	114	50
MX PRO 2 SP5 7040.100-8M		23060	142	162	24184	128	50
MX PRO 2 SP5 7040.120-8M		27030	171	158	28740	154	50
MX PRO 2 SP5 7040.140-8M		30820	200	154	33197	181	50
MX PRO 2 SP5 7040.160-8M		34480	231	149	37554	209	50
MX PRO 2 SP5 7040.180-8M		38070	263	144	41812	236	35
MX PRO 2 SP5 7040.200-8M		41620	297	140	45971	264	35
MX PRO 2 SP5 7040.060-9M		16200	97,6	165	16622	84,6	50
MX PRO 2 SP5 7040.070-9M		18760	113	166	19310	99,2	50
MX PRO 2 SP5 7040.080-9M		21230	129	164	21970	114	50
MX PRO 2 SP5 7040.090-9M		23630	144	164	24603	129	50
MX PRO 2 SP5 7040.100-9M		25950	160	162	27207	144	50
MX PRO 2 SP5 7040.120-9M		30410	192	158	32332	174	50
MX PRO 2 SP5 7040.140-9M		34670	225	154	37346	204	50
MX PRO 2 SP5 7040.160-9M		38790	259	149	42248	235	35
MX PRO 2 SP5 7040.180-9M		42820	296	144	47039	266	35
MX PRO 2 SP5 7040.200-9M		46820	334	140	51718	298	35
MX PRO 2 SP5 7040.060-5M		8750	53,4	163	9234	47	50
MX PRO 2 SP5 7040.070-5M		10130	62,2	162	10728	55,1	50
MX PRO 2 SP5 7040.080-5M		11500	71	161	12206	63,3	50
MX PRO 2 SP5 7040.090-5M		12830	79,7	160	13668	71,5	50
MX PRO 2 SP5 7040.100-5M		14150	88,6	159	15115	79,8	50
MX PRO 2 SP5 7040.120-5M		16710	107	156	17962	96,5	50
MX PRO 2 SP5 7040.140-5M		19190	125	153	20748	113	50
MX PRO 2 SP5 7040.160-5M		21580	144	149	23471	130	50
MX PRO 2 SP5 7040.180-5M		23890	164	145	26133	148	50
MX PRO 2 SP5 7040.200-5M		26130	185	141	28732	165	35
MX PRO 2 SP5 7040.060-6M		10500	63,9	164	11081	56,4	50
MX PRO 2 SP5 7040.070-6M		12160	74,3	163	12873	66,1	50
MX PRO 2 SP5 7040.080-6M		13790	84,8	162	14647	75,9	50
MX PRO 2 SP5 7040.090-6M		15390	95,4	161	16402	85,8	50
MX PRO 2 SP5 7040.100-6M		16960	106	160	18138	95,7	50
MX PRO 2 SP5 7040.120-6M		20010	128	156	21555	116	50
MX PRO 2 SP5 7040.140-6M		22940	150	152	24897	136	50
MX PRO 2 SP5 7040.160-6M		25760	173	148	28165	157	50
MX PRO 2 SP5 7040.180-6M		28480	197	144	31359	177	50
MX PRO 2 SP5 7040.200-6M	AS-45M	31090	223	139	34478	198	35
MX PRO 2 SP5 7040.060-7M	AS-45N	12300	74,4	165	12928	65,8	50
MX PRO 2 SP5 7040.070-7M	AS-45W	14250	87	163	15019	77,2	50
MX PRO 2 SP5 7040.080-7M		16140	99,6	162	17088	88,6	50
MX PRO 2 SP5 7040.090-7M		17990	112	160	19135	100	50
MX PRO 2 SP5 7040.100-7M		19780	125	158	21161	112	50
MX PRO 2 SP5 7040.120-7M		23240	151	153	25147	135	50
MX PRO 2 SP5 7040.140-7M		26560	177	150	29047	159	50
MX PRO 2 SP5 7040.160-7M		29760	204	145	32860	183	50
MX PRO 2 SP5 7040.180-7M		32880	231	142	36586	207	35
MX PRO 2 SP5 7040.200-7M		35940	259	138	40225	231	35
MX PRO 2 SP5 7040.060-8M		14080	86,5	162	14775	75,2	50
MX PRO 2 SP5 7040.070-8M		16300	100	163	17164	88,2	50
MX PRO 2 SP5 7040.080-8M		18450	114	161	19529	101	50
MX PRO 2 SP5 7040.090-8M		20530	128	160	21869	114	50
MX PRO 2 SP5 7040.100-8M		22550	142	158	24184	128	50
MX PRO 2 SP5 7040.120-8M		26430	171	154	28740	154	50
MX PRO 2 SP5 7040.140-8M		30130	200	150	33197	181	50
MX PRO 2 SP5 7040.160-8M		33710	231	145	37554	209	50
MX PRO 2 SP5 7040.180-8M		37210	263	141	41812	236	35
MX PRO 2 SP5 7040.200-8M		40690	297	137	45971	264	35
MX PRO 2 SP5 7040.060-9M		15840	97,6	162	16622	84,6	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7040.070-9M		18340	113	162	19310	99,2	50
MX PRO 2 5P5 7040.080-9M		20760	129	160	21970	114	50
MX PRO 2 5P5 7040.090-9M		23100	144	160	24603	129	50
MX PRO 2 5P5 7040.100-9M		25370	160	158	27207	144	50
MX PRO 2 5P5 7040.120-9M		29730	192	154	32332	174	50
MX PRO 2 5P5 7040.140-9M		33900	225	150	37346	204	50
MX PRO 2 5P5 7040.160-9M		37930	259	146	42248	235	35
MX PRO 2 5P5 7040.180-9M		41870	296	141	47039	266	35
MX PRO 2 5P5 7040.200-9M		45780	334	137	51718	298	35
MX PRO 2 5P5 7040.060-5M		8650	53,4	161	9234	47	50
MX PRO 2 5P5 7040.070-5M		10020	62,2	161	10728	55,1	50
MX PRO 2 5P5 7040.080-5M		11370	71	160	12206	63,3	50
MX PRO 2 5P5 7040.090-5M		12690	79,7	159	13668	71,5	50
MX PRO 2 5P5 7040.100-5M		13990	88,6	157	15115	79,8	50
MX PRO 2 5P5 7040.120-5M		16520	107	154	17962	96,5	50
MX PRO 2 5P5 7040.140-5M		18970	125	151	20748	113	50
MX PRO 2 5P5 7040.160-5M		21330	144	148	23471	130	50
MX PRO 2 5P5 7040.180-5M		23620	164	144	26133	148	50
MX PRO 2 5P5 7040.200-5M		25830	185	139	28732	165	35
MX PRO 2 5P5 7040.060-6M		10380	63,9	162	11081	56,4	50
MX PRO 2 5P5 7040.070-6M		12020	74,3	161	12873	66,1	50
MX PRO 2 5P5 7040.080-6M		13640	84,8	160	14647	75,9	50
MX PRO 2 5P5 7040.090-6M		15220	95,4	159	16402	85,8	50
MX PRO 2 5P5 7040.100-6M		16770	106	158	18138	95,7	50
MX PRO 2 5P5 7040.120-6M		19780	128	154	21555	116	50
MX PRO 2 5P5 7040.140-6M		22680	150	151	24897	136	50
MX PRO 2 5P5 7040.160-6M		25470	173	147	28165	157	50
MX PRO 2 5P5 7040.180-6M		28150	197	142	31359	177	50
MX PRO 2 5P5 7040.200-6M		30740	223	137	34478	198	35
MX PRO 2 5P5 7040.060-7M		12160	74,4	163	12928	65,8	50
MX PRO 2 5P5 7040.070-7M		14080	87	161	15019	77,2	50
MX PRO 2 5P5 7040.080-7M		15950	99,6	160	17088	88,6	50
MX PRO 2 5P5 7040.090-7M		17770	112	158	19135	100	50
MX PRO 2 5P5 7040.100-7M		19550	125	156	21161	112	50
MX PRO 2 5P5 7040.120-7M		22980	151	152	25147	135	50
MX PRO 2 5P5 7040.140-7M		26260	177	148	29047	159	50
MX PRO 2 5P5 7040.160-7M		29430	204	144	32860	183	50
MX PRO 2 5P5 7040.180-7M		32510	231	140	36586	207	35
MX PRO 2 5P5 7040.200-7M		35530	259	137	40225	231	35
MX PRO 2 5P5 7040.060-8M		13910	86,5	160	14775	75,2	50
MX PRO 2 5P5 7040.070-8M		16110	100	161	17164	88,2	50
MX PRO 2 5P5 7040.080-8M		18240	114	160	19529	101	50
MX PRO 2 5P5 7040.090-8M		20290	128	158	21869	114	50
MX PRO 2 5P5 7040.100-8M		22290	142	156	24184	128	50
MX PRO 2 5P5 7040.120-8M		26130	171	152	28740	154	50
MX PRO 2 5P5 7040.140-8M		29790	200	148	33197	181	50
MX PRO 2 5P5 7040.160-8M		33330	231	144	37554	209	50
MX PRO 2 5P5 7040.180-8M		36790	263	139	41812	236	35
MX PRO 2 5P5 7040.200-8M		40230	297	135	45971	264	35
MX PRO 2 5P5 7040.060-9M		15660	97,6	160	16622	84,6	50
MX PRO 2 5P5 7040.070-9M		18130	113	160	19310	99,2	50
MX PRO 2 5P5 7040.080-9M		20520	129	159	21970	114	50
MX PRO 2 5P5 7040.090-9M		22830	144	158	24603	129	50
MX PRO 2 5P5 7040.100-9M		25080	160	156	27207	144	50
MX PRO 2 5P5 7040.120-9M		29390	192	153	32332	174	50
MX PRO 2 5P5 7040.140-9M		33510	225	148	37346	204	50
MX PRO 2 5P5 7040.160-9M		37490	259	144	42248	235	35
MX PRO 2 5P5 7040.180-9M		41390	296	139	47039	266	35
MX PRO 2 5P5 7040.200-9M		45260	334	135	51718	298	35
MX PRO 2 5P5 7040.060-5M	AS-55M AS-55N AS-55W	8350	53,4	156	9234	47	50
MX PRO 2 5P5 7040.070-5M		9670	62,2	155	10728	55,1	50
MX PRO 2 5P5 7040.080-5M		10980	71	154	12206	63,3	50
MX PRO 2 5P5 7040.090-5M		12250	79,7	153	13668	71,5	50
MX PRO 2 5P5 7040.100-5M		13510	88,6	152	15115	79,8	50
MX PRO 2 5P5 7040.120-5M		15960	107	149	17962	96,5	50
MX PRO 2 5P5 7040.140-5M		18320	125	146	20748	113	50
MX PRO 2 5P5 7040.160-5M		20600	144	143	23471	130	50
MX PRO 2 5P5 7040.180-5M		22810	164	139	26133	148	50
MX PRO 2 5P5 7040.200-5M		24940	185	134	28732	165	35
MX PRO 2 5P5 7040.060-6M		10020	63,9	156	11081	56,4	50
MX PRO 2 5P5 7040.070-6M		11610	74,3	156	12873	66,1	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7040.080-6M		13160	84,8	155	14647	75,9	50
MX PRO 2 5P5 7040.090-6M		14690	95,4	153	16402	85,8	50
MX PRO 2 5P5 7040.100-6M		16190	106	152	18138	95,7	50
MX PRO 2 5P5 7040.120-6M		19100	128	149	21555	116	50
MX PRO 2 5P5 7040.140-6M		21900	150	146	24897	136	50
MX PRO 2 5P5 7040.160-6M		24590	173	142	28165	157	50
MX PRO 2 5P5 7040.180-6M		27190	197	138	31359	177	50
MX PRO 2 5P5 7040.200-6M		29680	223	133	34478	198	35
MX PRO 2 5P5 7040.060-7M		11750	74,4	157	12928	65,8	50
MX PRO 2 5P5 7040.070-7M		13600	87	156	15019	77,2	50
MX PRO 2 5P5 7040.080-7M		15410	99,6	154	17088	88,6	50
MX PRO 2 5P5 7040.090-7M		17170	112	153	19135	100	50
MX PRO 2 5P5 7040.100-7M		18880	125	151	21161	112	50
MX PRO 2 5P5 7040.120-7M		22180	151	146	25147	135	50
MX PRO 2 5P5 7040.140-7M		25350	177	143	29047	159	50
MX PRO 2 5P5 7040.160-7M		28410	204	139	32860	183	50
MX PRO 2 5P5 7040.180-7M		31380	231	135	36586	207	35
MX PRO 2 5P5 7040.200-7M		34310	259	132	40225	231	35
MX PRO 2 5P5 7040.060-8M		13440	86,5	155	14775	75,2	50
MX PRO 2 5P5 7040.070-8M		15570	100	155	17164	88,2	50
MX PRO 2 5P5 7040.080-8M		17620	114	154	19529	101	50
MX PRO 2 5P5 7040.090-8M		19600	128	153	21869	114	50
MX PRO 2 5P5 7040.100-8M		21530	142	151	24184	128	50
MX PRO 2 5P5 7040.120-8M		25230	171	147	28740	154	50
MX PRO 2 5P5 7040.140-8M		28760	200	143	33197	181	50
MX PRO 2 5P5 7040.160-8M		32170	231	139	37554	209	50
MX PRO 2 5P5 7040.180-8M		35520	263	135	41812	236	35
MX PRO 2 5P5 7040.200-8M		38840	297	130	45971	264	35
MX PRO 2 5P5 7040.060-9M		15120	97,6	154	16622	84,6	50
MX PRO 2 5P5 7040.070-9M		17510	113	154	19310	99,2	50
MX PRO 2 5P5 7040.080-9M		19820	129	153	21970	114	50
MX PRO 2 5P5 7040.090-9M		22050	144	153	24603	129	50
MX PRO 2 5P5 7040.100-9M		24220	160	151	27207	144	50
MX PRO 2 5P5 7040.120-9M		28380	192	147	32332	174	50
MX PRO 2 5P5 7040.140-9M		32360	225	143	37346	204	50
MX PRO 2 5P5 7040.160-9M		36200	259	139	42248	235	35
MX PRO 2 5P5 7040.180-9M		39970	296	135	47039	266	35
MX PRO 2 5P5 7040.200-9M		43700	334	130	51718	298	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 5P5 3000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7030.060-5M		8220	53,4	153	8680	47	50
MX PRO 2 5P5 7030.070-5M		9530	62,2	153	10084	55,1	50
MX PRO 2 5P5 7030.080-5M		10810	71	152	11473	63,3	50
MX PRO 2 5P5 7030.090-5M		12060	79,7	151	12848	71,5	50
MX PRO 2 5P5 7030.100-5M		13300	88,6	150	14208	79,8	50
MX PRO 2 5P5 7030.120-5M		15710	107	146	16885	96,5	50
MX PRO 2 5P5 7030.140-5M		18040	125	144	19503	113	50
MX PRO 2 5P5 7030.160-5M		20290	144	140	22063	130	50
MX PRO 2 5P5 7030.180-5M		22460	164	136	24565	148	50
MX PRO 2 5P5 7030.200-5M		24560	185	132	27008	165	35
MX PRO 2 5P5 7030.060-6M		9870	63,9	154	10416	56,4	50
MX PRO 2 5P5 7030.070-6M		11430	74,3	153	12101	66,1	50
MX PRO 2 5P5 7030.080-6M		12960	84,8	152	13768	75,9	50
MX PRO 2 5P5 7030.090-6M		14470	95,4	151	15418	85,8	50
MX PRO 2 5P5 7030.100-6M		15940	106	150	17050	95,7	50
MX PRO 2 5P5 7030.120-6M		18810	128	146	20262	116	50
MX PRO 2 5P5 7030.140-6M		21560	150	143	23404	136	50
MX PRO 2 5P5 7030.160-6M		24220	173	140	26476	157	50
MX PRO 2 5P5 7030.180-6M		26770	197	135	29478	177	50
MX PRO 2 5P5 7030.200-6M		29220	223	131	32410	198	35
MX PRO 2 5P5 7030.060-7M		11570	74,4	155	12152	65,8	50
MX PRO 2 5P5 7030.070-7M		13400	87	154	14118	77,2	50
MX PRO 2 5P5 7030.080-7M	STA	15170	99,6	152	16063	88,6	50
MX PRO 2 5P5 7030.090-7M	STA1	16910	112	150	17987	100	50
MX PRO 2 5P5 7030.100-7M	STU-S	18590	125	148	19891	112	50
MX PRO 2 5P5 7030.120-7M	S05	21850	151	144	23639	135	50
MX PRO 2 5P5 7030.140-7M	S07	24970	177	141	27304	159	50
MX PRO 2 5P5 7030.160-7M	STE-S	27980	204	137	30888	183	50
MX PRO 2 5P5 7030.180-7M		30910	231	133	34391	207	35
MX PRO 2 5P5 7030.200-7M		33780	259	130	37811	231	35
MX PRO 2 5P5 7030.060-8M		13240	86,5	153	13888	75,2	50
MX PRO 2 5P5 7030.070-8M		15320	100	153	16134	88,2	50
MX PRO 2 5P5 7030.080-8M		17340	114	152	18357	101	50
MX PRO 2 5P5 7030.090-8M		19300	128	150	20557	114	50
MX PRO 2 5P5 7030.100-8M		21200	142	149	22733	128	50
MX PRO 2 5P5 7030.120-8M		24840	171	145	27016	154	50
MX PRO 2 5P5 7030.140-8M		28320	200	141	31205	181	50
MX PRO 2 5P5 7030.160-8M		31690	231	137	35301	209	50
MX PRO 2 5P5 7030.180-8M		34980	263	133	39303	236	35
MX PRO 2 5P5 7030.200-8M		38250	297	128	43213	264	35
MX PRO 2 5P5 7030.060-9M		14890	97,6	152	15624	84,6	50
MX PRO 2 5P5 7030.070-9M		17240	113	152	18151	99,2	50
MX PRO 2 5P5 7030.080-9M		19510	129	151	20652	114	50
MX PRO 2 5P5 7030.090-9M		21710	144	150	23126	129	50
MX PRO 2 5P5 7030.100-9M		23850	160	149	25575	144	50
MX PRO 2 5P5 7030.120-9M		27950	192	145	30392	174	50
MX PRO 2 5P5 7030.140-9M		31870	225	141	35105	204	50
MX PRO 2 5P5 7030.160-9M		35650	259	137	39713	235	35
MX PRO 2 5P5 7030.180-9M		39360	296	132	44216	266	35
MX PRO 2 5P5 7030.200-9M		43030	334	128	48615	298	35
MX PRO 2 5P5 7030.060-5M		8400	53,4	157	8680	47	50
MX PRO 2 5P5 7030.070-5M		9740	62,2	156	10084	55,1	50
MX PRO 2 5P5 7030.080-5M		11050	71	155	11473	63,3	50
MX PRO 2 5P5 7030.090-5M		12340	79,7	154	12848	71,5	50
MX PRO 2 5P5 7030.100-5M		13600	88,6	153	14208	79,8	50
MX PRO 2 5P5 7030.120-5M		16070	107	150	16885	96,5	50
MX PRO 2 5P5 7030.140-5M		18450	125	147	19503	113	50
MX PRO 2 5P5 7030.160-5M		20750	144	144	22063	130	50
MX PRO 2 5P5 7030.180-5M	SV	22970	164	140	24565	148	50
MX PRO 2 5P5 7030.200-5M	STU-M	25120	185	135	27008	165	35
MX PRO 2 5P5 7030.060-6M	STE-M	10090	63,9	157	10416	56,4	50
MX PRO 2 5P5 7030.070-6M	STW	11700	74,3	157	12101	66,1	50
MX PRO 2 5P5 7030.080-6M		13260	84,8	156	13768	75,9	50
MX PRO 2 5P5 7030.090-6M		14800	95,4	155	15418	85,8	50
MX PRO 2 5P5 7030.100-6M		16310	106	153	17050	95,7	50
MX PRO 2 5P5 7030.120-6M		19240	128	150	20262	116	50
MX PRO 2 5P5 7030.140-6M		22050	150	147	23404	136	50
MX PRO 2 5P5 7030.160-6M		24760	173	143	26476	157	50
MX PRO 2 5P5 7030.180-6M		27370	197	138	29478	177	50
MX PRO 2 5P5 7030.200-6M		29890	223	134	32410	198	35

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 SP5 7030.060-7M		11830	74,4	159	12152	65,8	50
MX PRO 2 SP5 7030.070-7M		13700	87	157	14118	77,2	50
MX PRO 2 SP5 7030.080-7M		15520	99,6	155	16063	88,6	50
MX PRO 2 SP5 7030.090-7M		17290	112	154	17987	100	50
MX PRO 2 SP5 7030.100-7M		19020	125	152	19891	112	50
MX PRO 2 SP5 7030.120-7M		22340	151	147	23639	135	50
MX PRO 2 SP5 7030.140-7M		25530	177	144	27304	159	50
MX PRO 2 SP5 7030.160-7M		28610	204	140	30888	183	50
MX PRO 2 SP5 7030.180-7M		31610	231	136	34391	207	35
MX PRO 2 SP5 7030.200-7M		34550	259	133	37811	231	35
MX PRO 2 SP5 7030.060-8M		13530	86,5	156	13888	75,2	50
MX PRO 2 SP5 7030.070-8M		15670	100	156	16134	88,2	50
MX PRO 2 SP5 7030.080-8M		17730	114	155	18357	101	50
MX PRO 2 SP5 7030.090-8M		19730	128	154	20557	114	50
MX PRO 2 SP5 7030.100-8M		21680	142	152	22733	128	50
MX PRO 2 SP5 7030.120-8M		25410	171	148	27016	154	50
MX PRO 2 SP5 7030.140-8M		28970	200	144	31205	181	50
MX PRO 2 SP5 7030.160-8M		32410	231	140	35301	209	50
MX PRO 2 SP5 7030.180-8M		35780	263	136	39303	236	35
MX PRO 2 SP5 7030.200-8M		39120	297	131	43213	264	35
MX PRO 2 SP5 7030.060-9M		15230	97,6	156	15624	84,6	50
MX PRO 2 SP5 7030.070-9M		17630	113	156	18151	99,2	50
MX PRO 2 SP5 7030.080-9M		19960	129	154	20652	114	50
MX PRO 2 SP5 7030.090-9M		22210	144	154	23126	129	50
MX PRO 2 SP5 7030.100-9M		24390	160	152	25575	144	50
MX PRO 2 SP5 7030.120-9M		28590	192	148	30392	174	50
MX PRO 2 SP5 7030.140-9M		32590	225	144	35105	204	50
MX PRO 2 SP5 7030.160-9M		36460	259	140	39713	235	35
MX PRO 2 SP5 7030.180-9M		40250	296	135	44216	266	35
MX PRO 2 SP5 7030.200-9M		44010	334	131	48615	298	35
MX PRO 2 SP5 7030.060-5M		8220	53,4	153	8680	47	50
MX PRO 2 SP5 7030.070-5M		9530	62,2	153	10084	55,1	50
MX PRO 2 SP5 7030.080-5M		10810	71	152	11473	63,3	50
MX PRO 2 SP5 7030.090-5M		12060	79,7	151	12848	71,5	50
MX PRO 2 SP5 7030.100-5M		13300	88,6	150	14208	79,8	50
MX PRO 2 SP5 7030.120-5M		15710	107	146	16885	96,5	50
MX PRO 2 SP5 7030.140-5M		18040	125	144	19503	113	50
MX PRO 2 SP5 7030.160-5M		20290	144	140	22063	130	50
MX PRO 2 SP5 7030.180-5M		22460	164	136	24565	148	50
MX PRO 2 SP5 7030.200-5M		24560	185	132	27008	165	35
MX PRO 2 SP5 7030.060-6M		9870	63,9	154	10416	56,4	50
MX PRO 2 SP5 7030.070-6M		11430	74,3	153	12101	66,1	50
MX PRO 2 SP5 7030.080-6M		12960	84,8	152	13768	75,9	50
MX PRO 2 SP5 7030.090-6M		14470	95,4	151	15418	85,8	50
MX PRO 2 SP5 7030.100-6M		15940	106	150	17050	95,7	50
MX PRO 2 SP5 7030.120-6M		18810	128	146	20262	116	50
MX PRO 2 SP5 7030.140-6M		21560	150	143	23404	136	50
MX PRO 2 SP5 7030.160-6M		24220	173	140	26476	157	50
MX PRO 2 SP5 7030.180-6M		26770	197	135	29478	177	50
MX PRO 2 SP5 7030.200-6M	AS-45M	29220	223	131	32410	198	35
MX PRO 2 SP5 7030.060-7M	AS-45N	11570	74,4	155	12152	65,8	50
MX PRO 2 SP5 7030.070-7M	AS-45W	13400	87	154	14118	77,2	50
MX PRO 2 SP5 7030.080-7M		15170	99,6	152	16063	88,6	50
MX PRO 2 SP5 7030.090-7M		16910	112	150	17987	100	50
MX PRO 2 SP5 7030.100-7M		18590	125	148	19891	112	50
MX PRO 2 SP5 7030.120-7M		21850	151	144	23639	135	50
MX PRO 2 SP5 7030.140-7M		24970	177	141	27304	159	50
MX PRO 2 SP5 7030.160-7M		27980	204	137	30888	183	50
MX PRO 2 SP5 7030.180-7M		30910	231	133	34391	207	35
MX PRO 2 SP5 7030.200-7M		33780	259	130	37811	231	35
MX PRO 2 SP5 7030.060-8M		13240	86,5	153	13888	75,2	50
MX PRO 2 SP5 7030.070-8M		15320	100	153	16134	88,2	50
MX PRO 2 SP5 7030.080-8M		17340	114	152	18357	101	50
MX PRO 2 SP5 7030.090-8M		19300	128	150	20557	114	50
MX PRO 2 SP5 7030.100-8M		21200	142	149	22733	128	50
MX PRO 2 SP5 7030.120-8M		24840	171	145	27016	154	50
MX PRO 2 SP5 7030.140-8M		28320	200	141	31205	181	50
MX PRO 2 SP5 7030.160-8M		31690	231	137	35301	209	50
MX PRO 2 SP5 7030.180-8M		34980	263	133	39303	236	35
MX PRO 2 SP5 7030.200-8M		38250	297	128	43213	264	35
MX PRO 2 SP5 7030.060-9M		14890	97,6	152	15624	84,6	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7030.070-9M		17240	113	152	18151	99,2	50
MX PRO 2 5P5 7030.080-9M		19510	129	151	20652	114	50
MX PRO 2 5P5 7030.090-9M		21710	144	150	23126	129	50
MX PRO 2 5P5 7030.100-9M		23850	160	149	25575	144	50
MX PRO 2 5P5 7030.120-9M		27950	192	145	30392	174	50
MX PRO 2 5P5 7030.140-9M		31870	225	141	35105	204	50
MX PRO 2 5P5 7030.160-9M		35650	259	137	39713	235	35
MX PRO 2 5P5 7030.180-9M		39360	296	132	44216	266	35
MX PRO 2 5P5 7030.200-9M		43030	334	128	48615	298	35
MX PRO 2 5P5 7030.060-5M		8130	53,4	152	8680	47	50
MX PRO 2 5P5 7030.070-5M		9420	62,2	151	10084	55,1	50
MX PRO 2 5P5 7030.080-5M		10680	71	150	11473	63,3	50
MX PRO 2 5P5 7030.090-5M		11930	79,7	149	12848	71,5	50
MX PRO 2 5P5 7030.100-5M		13150	88,6	148	14208	79,8	50
MX PRO 2 5P5 7030.120-5M		15530	107	145	16885	96,5	50
MX PRO 2 5P5 7030.140-5M		17830	125	142	19503	113	50
MX PRO 2 5P5 7030.160-5M		20050	144	139	22063	130	50
MX PRO 2 5P5 7030.180-5M		22200	164	135	24565	148	50
MX PRO 2 5P5 7030.200-5M		24280	185	131	27008	165	35
MX PRO 2 5P5 7030.060-6M		9760	63,9	152	10416	56,4	50
MX PRO 2 5P5 7030.070-6M		11300	74,3	152	12101	66,1	50
MX PRO 2 5P5 7030.080-6M		12820	84,8	151	13768	75,9	50
MX PRO 2 5P5 7030.090-6M		14310	95,4	150	15418	85,8	50
MX PRO 2 5P5 7030.100-6M		15760	106	148	17050	95,7	50
MX PRO 2 5P5 7030.120-6M		18600	128	145	20262	116	50
MX PRO 2 5P5 7030.140-6M		21320	150	142	23404	136	50
MX PRO 2 5P5 7030.160-6M		23940	173	138	26476	157	50
MX PRO 2 5P5 7030.180-6M		26460	197	134	29478	177	50
MX PRO 2 5P5 7030.200-6M		28900	223	129	32410	198	35
MX PRO 2 5P5 7030.060-7M		11430	74,4	153	12152	65,8	50
MX PRO 2 5P5 7030.070-7M		13240	87	152	14118	77,2	50
MX PRO 2 5P5 7030.080-7M		15000	99,6	150	16063	88,6	50
MX PRO 2 5P5 7030.090-7M		16710	112	149	17987	100	50
MX PRO 2 5P5 7030.100-7M		18380	125	147	19891	112	50
MX PRO 2 5P5 7030.120-7M		21600	151	143	23639	135	50
MX PRO 2 5P5 7030.140-7M		24680	177	139	27304	159	50
MX PRO 2 5P5 7030.160-7M		27660	204	135	30888	183	50
MX PRO 2 5P5 7030.180-7M		30560	231	132	34391	207	35
MX PRO 2 5P5 7030.200-7M		33400	259	128	37811	231	35
MX PRO 2 5P5 7030.060-8M		13080	86,5	151	13888	75,2	50
MX PRO 2 5P5 7030.070-8M		15140	100	151	16134	88,2	50
MX PRO 2 5P5 7030.080-8M		17140	114	150	18357	101	50
MX PRO 2 5P5 7030.090-8M		19080	128	149	20557	114	50
MX PRO 2 5P5 7030.100-8M		20950	142	147	22733	128	50
MX PRO 2 5P5 7030.120-8M		24560	171	143	27016	154	50
MX PRO 2 5P5 7030.140-8M		28000	200	140	31205	181	50
MX PRO 2 5P5 7030.160-8M		31330	231	135	35301	209	50
MX PRO 2 5P5 7030.180-8M		34590	263	131	39303	236	35
MX PRO 2 5P5 7030.200-8M		37820	297	127	43213	264	35
MX PRO 2 5P5 7030.060-9M		14720	97,6	150	15624	84,6	50
MX PRO 2 5P5 7030.070-9M		17040	113	150	18151	99,2	50
MX PRO 2 5P5 7030.080-9M		19290	129	149	20652	114	50
MX PRO 2 5P5 7030.090-9M		21460	144	149	23126	129	50
MX PRO 2 5P5 7030.100-9M		23580	160	147	25575	144	50
MX PRO 2 5P5 7030.120-9M		27630	192	143	30392	174	50
MX PRO 2 5P5 7030.140-9M		31500	225	140	35105	204	50
MX PRO 2 5P5 7030.160-9M		35240	259	136	39713	235	35
MX PRO 2 5P5 7030.180-9M		38910	296	131	44216	266	35
MX PRO 2 5P5 7030.200-9M		42540	334	127	48615	298	35
MX PRO 2 5P5 7030.060-5M	AS-55M AS-55N AS-55W	7850	53,4	147	8680	47	50
MX PRO 2 5P5 7030.070-5M		9090	62,2	146	10084	55,1	50
MX PRO 2 5P5 7030.080-5M		10320	71	145	11473	63,3	50
MX PRO 2 5P5 7030.090-5M		11520	79,7	144	12848	71,5	50
MX PRO 2 5P5 7030.100-5M		12700	88,6	143	14208	79,8	50
MX PRO 2 5P5 7030.120-5M		15000	107	140	16885	96,5	50
MX PRO 2 5P5 7030.140-5M		17220	125	137	19503	113	50
MX PRO 2 5P5 7030.160-5M		19370	144	134	22063	130	50
MX PRO 2 5P5 7030.180-5M		21440	164	130	24565	148	50
MX PRO 2 5P5 7030.200-5M		23440	185	126	27008	165	35
MX PRO 2 5P5 7030.060-6M		9420	63,9	147	10416	56,4	50
MX PRO 2 5P5 7030.070-6M		10910	74,3	146	12101	66,1	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7030.080-6M		12370	84,8	145	13768	75,9	50
MX PRO 2 5P5 7030.090-6M		13810	95,4	144	15418	85,8	50
MX PRO 2 5P5 7030.100-6M		15220	106	143	17050	95,7	50
MX PRO 2 5P5 7030.120-6M		17950	128	140	20262	116	50
MX PRO 2 5P5 7030.140-6M		20590	150	137	23404	136	50
MX PRO 2 5P5 7030.160-6M		23120	173	133	26476	157	50
MX PRO 2 5P5 7030.180-6M		25550	197	129	29478	177	50
MX PRO 2 5P5 7030.200-6M		27900	223	125	32410	198	35
MX PRO 2 5P5 7030.060-7M		11040	74,4	148	12152	65,8	50
MX PRO 2 5P5 7030.070-7M		12790	87	147	14118	77,2	50
MX PRO 2 5P5 7030.080-7M		14490	99,6	145	16063	88,6	50
MX PRO 2 5P5 7030.090-7M		16140	112	144	17987	100	50
MX PRO 2 5P5 7030.100-7M		17750	125	142	19891	112	50
MX PRO 2 5P5 7030.120-7M		20850	151	138	23639	135	50
MX PRO 2 5P5 7030.140-7M		23830	177	134	27304	159	50
MX PRO 2 5P5 7030.160-7M		26700	204	130	30888	183	50
MX PRO 2 5P5 7030.180-7M		29500	231	127	34391	207	35
MX PRO 2 5P5 7030.200-7M		32250	259	124	37811	231	35
MX PRO 2 5P5 7030.060-8M		12640	86,5	146	13888	75,2	50
MX PRO 2 5P5 7030.070-8M		14630	100	146	16134	88,2	50
MX PRO 2 5P5 7030.080-8M		16560	114	145	18357	101	50
MX PRO 2 5P5 7030.090-8M		18430	128	143	20557	114	50
MX PRO 2 5P5 7030.100-8M		20240	142	142	22733	128	50
MX PRO 2 5P5 7030.120-8M		23710	171	138	27016	154	50
MX PRO 2 5P5 7030.140-8M		27030	200	135	31205	181	50
MX PRO 2 5P5 7030.160-8M		30240	231	130	35301	209	50
MX PRO 2 5P5 7030.180-8M		33390	263	126	39303	236	35
MX PRO 2 5P5 7030.200-8M		36510	297	122	43213	264	35
MX PRO 2 5P5 7030.060-9M		14210	97,6	145	15624	84,6	50
MX PRO 2 5P5 7030.070-9M		16460	113	145	18151	99,2	50
MX PRO 2 5P5 7030.080-9M		18630	129	144	20652	114	50
MX PRO 2 5P5 7030.090-9M		20730	144	143	23126	129	50
MX PRO 2 5P5 7030.100-9M		22770	160	142	25575	144	50
MX PRO 2 5P5 7030.120-9M		26680	192	138	30392	174	50
MX PRO 2 5P5 7030.140-9M		30420	225	135	35105	204	50
MX PRO 2 5P5 7030.160-9M		34030	259	131	39713	235	35
MX PRO 2 5P5 7030.180-9M		37570	296	126	44216	266	35
MX PRO 2 5P5 7030.200-9M		41080	334	122	48615	298	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 5P5 2700K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7027.060-5M		7870	53,4	147	8311	47	50
MX PRO 2 5P5 7027.070-5M		9120	62,2	146	9655	55,1	50
MX PRO 2 5P5 7027.080-5M		10350	71	145	10985	63,3	50
MX PRO 2 5P5 7027.090-5M		11550	79,7	144	12301	71,5	50
MX PRO 2 5P5 7027.100-5M		12740	88,6	143	13604	79,8	50
MX PRO 2 5P5 7027.120-5M		15040	107	140	16166	96,5	50
MX PRO 2 5P5 7027.140-5M		17270	125	138	18673	113	50
MX PRO 2 5P5 7027.160-5M		19420	144	134	21124	130	50
MX PRO 2 5P5 7027.180-5M		21510	164	131	23519	148	50
MX PRO 2 5P5 7027.200-5M		23520	185	127	25859	165	35
MX PRO 2 5P5 7027.060-6M		9450	63,9	147	9973	56,4	50
MX PRO 2 5P5 7027.070-6M		10940	74,3	147	11586	66,1	50
MX PRO 2 5P5 7027.080-6M		12410	84,8	146	13182	75,9	50
MX PRO 2 5P5 7027.090-6M		13850	95,4	145	14762	85,8	50
MX PRO 2 5P5 7027.100-6M		15260	106	143	16324	95,7	50
MX PRO 2 5P5 7027.120-6M		18010	128	140	19399	116	50
MX PRO 2 5P5 7027.140-6M		20650	150	137	22408	136	50
MX PRO 2 5P5 7027.160-6M		23180	173	133	25349	157	50
MX PRO 2 5P5 7027.180-6M		25630	197	130	28223	177	50
MX PRO 2 5P5 7027.200-6M		27980	223	125	31031	198	35
MX PRO 2 5P5 7027.060-7M		11070	74,4	148	11635	65,8	50
MX PRO 2 5P5 7027.070-7M		12830	87	147	13517	77,2	50
MX PRO 2 5P5 7027.080-7M	STA	14530	99,6	145	15379	88,6	50
MX PRO 2 5P5 7027.090-7M	STA1	16190	112	144	17222	100	50
MX PRO 2 5P5 7027.100-7M	STU-S	17800	125	142	19045	112	50
MX PRO 2 5P5 7027.120-7M	S05	20920	151	138	22633	135	50
MX PRO 2 5P5 7027.140-7M	S07	23900	177	135	26142	159	50
MX PRO 2 5P5 7027.160-7M	STE-S	26790	204	131	29574	183	50
MX PRO 2 5P5 7027.180-7M		29590	231	128	32927	207	35
MX PRO 2 5P5 7027.200-7M		32350	259	124	36202	231	35
MX PRO 2 5P5 7027.060-8M		12670	86,5	146	13297	75,2	50
MX PRO 2 5P5 7027.070-8M		14670	100	146	15448	88,2	50
MX PRO 2 5P5 7027.080-8M		16610	114	145	17576	101	50
MX PRO 2 5P5 7027.090-8M		18480	128	144	19682	114	50
MX PRO 2 5P5 7027.100-8M		20300	142	142	21766	128	50
MX PRO 2 5P5 7027.120-8M		23780	171	139	25866	154	50
MX PRO 2 5P5 7027.140-8M		27120	200	135	29877	181	50
MX PRO 2 5P5 7027.160-8M		30340	231	131	33799	209	50
MX PRO 2 5P5 7027.180-8M		33490	263	127	37631	236	35
MX PRO 2 5P5 7027.200-8M		36620	297	123	41374	264	35
MX PRO 2 5P5 7027.060-9M		14250	97,6	146	14959	84,6	50
MX PRO 2 5P5 7027.070-9M		16510	113	146	17379	99,2	50
MX PRO 2 5P5 7027.080-9M		18680	129	144	19773	114	50
MX PRO 2 5P5 7027.090-9M		20790	144	144	22142	129	50
MX PRO 2 5P5 7027.100-9M		22830	160	142	24486	144	50
MX PRO 2 5P5 7027.120-9M		26760	192	139	29099	174	50
MX PRO 2 5P5 7027.140-9M		30510	225	135	33612	204	50
MX PRO 2 5P5 7027.160-9M		34130	259	131	38023	235	35
MX PRO 2 5P5 7027.180-9M		37680	296	127	42335	266	35
MX PRO 2 5P5 7027.200-9M		41200	334	123	46546	298	35
MX PRO 2 5P5 7027.060-5M		8050	53,4	150	8311	47	50
MX PRO 2 5P5 7027.070-5M		9320	62,2	149	9655	55,1	50
MX PRO 2 5P5 7027.080-5M		10580	71	149	10985	63,3	50
MX PRO 2 5P5 7027.090-5M		11810	79,7	148	12301	71,5	50
MX PRO 2 5P5 7027.100-5M		13020	88,6	146	13604	79,8	50
MX PRO 2 5P5 7027.120-5M		15390	107	143	16166	96,5	50
MX PRO 2 5P5 7027.140-5M		17670	125	141	18673	113	50
MX PRO 2 5P5 7027.160-5M		19870	144	137	21124	130	50
MX PRO 2 5P5 7027.180-5M	SV	22000	164	134	23519	148	50
MX PRO 2 5P5 7027.200-5M	STU-M	24050	185	130	25859	165	35
MX PRO 2 5P5 7027.060-6M	STE-M	9670	63,9	151	9973	56,4	50
MX PRO 2 5P5 7027.070-6M	STW	11200	74,3	150	11586	66,1	50
MX PRO 2 5P5 7027.080-6M		12700	84,8	149	13182	75,9	50
MX PRO 2 5P5 7027.090-6M		14170	95,4	148	14762	85,8	50
MX PRO 2 5P5 7027.100-6M		15620	106	147	16324	95,7	50
MX PRO 2 5P5 7027.120-6M		18420	128	143	19399	116	50
MX PRO 2 5P5 7027.140-6M		21110	150	140	22408	136	50
MX PRO 2 5P5 7027.160-6M		23710	173	137	25349	157	50
MX PRO 2 5P5 7027.180-6M		26210	197	133	28223	177	50
MX PRO 2 5P5 7027.200-6M		28620	223	128	31031	198	35

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 SP5 7027.060-7M		11330	74,4	152	11635	65,8	50
MX PRO 2 SP5 7027.070-7M		13120	87	150	13517	77,2	50
MX PRO 2 SP5 7027.080-7M		14860	99,6	149	15379	88,6	50
MX PRO 2 SP5 7027.090-7M		16560	112	147	17222	100	50
MX PRO 2 SP5 7027.100-7M		18210	125	145	19045	112	50
MX PRO 2 SP5 7027.120-7M		21390	151	141	22633	135	50
MX PRO 2 SP5 7027.140-7M		24440	177	138	26142	159	50
MX PRO 2 SP5 7027.160-7M		27390	204	134	29574	183	50
MX PRO 2 SP5 7027.180-7M		30260	231	130	32927	207	35
MX PRO 2 SP5 7027.200-7M		33080	259	127	36202	231	35
MX PRO 2 SP5 7027.060-8M		12960	86,5	149	13297	75,2	50
MX PRO 2 SP5 7027.070-8M		15000	100	150	15448	88,2	50
MX PRO 2 SP5 7027.080-8M		16980	114	148	17576	101	50
MX PRO 2 SP5 7027.090-8M		18890	128	147	19682	114	50
MX PRO 2 SP5 7027.100-8M		20750	142	146	21766	128	50
MX PRO 2 SP5 7027.120-8M		24330	171	142	25866	154	50
MX PRO 2 SP5 7027.140-8M		27740	200	138	29877	181	50
MX PRO 2 SP5 7027.160-8M		31030	231	134	33799	209	50
MX PRO 2 SP5 7027.180-8M		34260	263	130	37631	236	35
MX PRO 2 SP5 7027.200-8M		37460	297	126	41374	264	35
MX PRO 2 SP5 7027.060-9M		14580	97,6	149	14959	84,6	50
MX PRO 2 SP5 7027.070-9M		16880	113	149	17379	99,2	50
MX PRO 2 SP5 7027.080-9M		19110	129	148	19773	114	50
MX PRO 2 SP5 7027.090-9M		21260	144	147	22142	129	50
MX PRO 2 SP5 7027.100-9M		23360	160	146	24486	144	50
MX PRO 2 SP5 7027.120-9M		27370	192	142	29099	174	50
MX PRO 2 SP5 7027.140-9M		31200	225	138	33612	204	50
MX PRO 2 SP5 7027.160-9M		34910	259	134	38023	235	35
MX PRO 2 SP5 7027.180-9M		38540	296	130	42335	266	35
MX PRO 2 SP5 7027.200-9M		42140	334	126	46546	298	35
MX PRO 2 SP5 7027.060-5M		7870	53,4	147	8311	47	50
MX PRO 2 SP5 7027.070-5M		9120	62,2	146	9655	55,1	50
MX PRO 2 SP5 7027.080-5M		10350	71	145	10985	63,3	50
MX PRO 2 SP5 7027.090-5M		11550	79,7	144	12301	71,5	50
MX PRO 2 SP5 7027.100-5M		12740	88,6	143	13604	79,8	50
MX PRO 2 SP5 7027.120-5M		15040	107	140	16166	96,5	50
MX PRO 2 SP5 7027.140-5M		17270	125	138	18673	113	50
MX PRO 2 SP5 7027.160-5M		19420	144	134	21124	130	50
MX PRO 2 SP5 7027.180-5M		21510	164	131	23519	148	50
MX PRO 2 SP5 7027.200-5M		23520	185	127	25859	165	35
MX PRO 2 SP5 7027.060-6M		9450	63,9	147	9973	56,4	50
MX PRO 2 SP5 7027.070-6M		10940	74,3	147	11586	66,1	50
MX PRO 2 SP5 7027.080-6M		12410	84,8	146	13182	75,9	50
MX PRO 2 SP5 7027.090-6M		13850	95,4	145	14762	85,8	50
MX PRO 2 SP5 7027.100-6M		15260	106	143	16324	95,7	50
MX PRO 2 SP5 7027.120-6M		18010	128	140	19399	116	50
MX PRO 2 SP5 7027.140-6M		20650	150	137	22408	136	50
MX PRO 2 SP5 7027.160-6M		23180	173	133	25349	157	50
MX PRO 2 SP5 7027.180-6M		25630	197	130	28223	177	50
MX PRO 2 SP5 7027.200-6M	AS-45M	27980	223	125	31031	198	35
MX PRO 2 SP5 7027.060-7M	AS-45N	11070	74,4	148	11635	65,8	50
MX PRO 2 SP5 7027.070-7M	AS-45W	12830	87	147	13517	77,2	50
MX PRO 2 SP5 7027.080-7M		14530	99,6	145	15379	88,6	50
MX PRO 2 SP5 7027.090-7M		16190	112	144	17222	100	50
MX PRO 2 SP5 7027.100-7M		17800	125	142	19045	112	50
MX PRO 2 SP5 7027.120-7M		20920	151	138	22633	135	50
MX PRO 2 SP5 7027.140-7M		23900	177	135	26142	159	50
MX PRO 2 SP5 7027.160-7M		26790	204	131	29574	183	50
MX PRO 2 SP5 7027.180-7M		29590	231	128	32927	207	35
MX PRO 2 SP5 7027.200-7M		32350	259	124	36202	231	35
MX PRO 2 SP5 7027.060-8M		12670	86,5	146	13297	75,2	50
MX PRO 2 SP5 7027.070-8M		14670	100	146	15448	88,2	50
MX PRO 2 SP5 7027.080-8M		16610	114	145	17576	101	50
MX PRO 2 SP5 7027.090-8M		18480	128	144	19682	114	50
MX PRO 2 SP5 7027.100-8M		20300	142	142	21766	128	50
MX PRO 2 SP5 7027.120-8M		23780	171	139	25866	154	50
MX PRO 2 SP5 7027.140-8M		27120	200	135	29877	181	50
MX PRO 2 SP5 7027.160-8M		30340	231	131	33799	209	50
MX PRO 2 SP5 7027.180-8M		33490	263	127	37631	236	35
MX PRO 2 SP5 7027.200-8M		36620	297	123	41374	264	35
MX PRO 2 SP5 7027.060-9M		14250	97,6	146	14959	84,6	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7027.070-9M		16510	113	146	17379	99,2	50
MX PRO 2 5P5 7027.080-9M		18680	129	144	19773	114	50
MX PRO 2 5P5 7027.090-9M		20790	144	144	22142	129	50
MX PRO 2 5P5 7027.100-9M		22830	160	142	24486	144	50
MX PRO 2 5P5 7027.120-9M		26760	192	139	29099	174	50
MX PRO 2 5P5 7027.140-9M		30510	225	135	33612	204	50
MX PRO 2 5P5 7027.160-9M		34130	259	131	38023	235	35
MX PRO 2 5P5 7027.180-9M		37680	296	127	42335	266	35
MX PRO 2 5P5 7027.200-9M		41200	334	123	46546	298	35
MX PRO 2 5P5 7027.060-5M		7780	53,4	145	8311	47	50
MX PRO 2 5P5 7027.070-5M		9020	62,2	145	9655	55,1	50
MX PRO 2 5P5 7027.080-5M		10230	71	144	10985	63,3	50
MX PRO 2 5P5 7027.090-5M		11420	79,7	143	12301	71,5	50
MX PRO 2 5P5 7027.100-5M		12590	88,6	142	13604	79,8	50
MX PRO 2 5P5 7027.120-5M		14870	107	138	16166	96,5	50
MX PRO 2 5P5 7027.140-5M		17070	125	136	18673	113	50
MX PRO 2 5P5 7027.160-5M		19200	144	133	21124	130	50
MX PRO 2 5P5 7027.180-5M		21260	164	129	23519	148	50
MX PRO 2 5P5 7027.200-5M		23250	185	125	25859	165	35
MX PRO 2 5P5 7027.060-6M		9340	63,9	146	9973	56,4	50
MX PRO 2 5P5 7027.070-6M		10820	74,3	145	11586	66,1	50
MX PRO 2 5P5 7027.080-6M		12270	84,8	144	13182	75,9	50
MX PRO 2 5P5 7027.090-6M		13700	95,4	143	14762	85,8	50
MX PRO 2 5P5 7027.100-6M		15090	106	142	16324	95,7	50
MX PRO 2 5P5 7027.120-6M		17800	128	139	19399	116	50
MX PRO 2 5P5 7027.140-6M		20410	150	136	22408	136	50
MX PRO 2 5P5 7027.160-6M		22920	173	132	25349	157	50
MX PRO 2 5P5 7027.180-6M		25340	197	128	28223	177	50
MX PRO 2 5P5 7027.200-6M		27670	223	124	31031	198	35
MX PRO 2 5P5 7027.060-7M		10940	74,4	147	11635	65,8	50
MX PRO 2 5P5 7027.070-7M		12670	87	145	13517	77,2	50
MX PRO 2 5P5 7027.080-7M		14360	99,6	144	15379	88,6	50
MX PRO 2 5P5 7027.090-7M		16000	112	142	17222	100	50
MX PRO 2 5P5 7027.100-7M		17600	125	140	19045	112	50
MX PRO 2 5P5 7027.120-7M		20680	151	136	22633	135	50
MX PRO 2 5P5 7027.140-7M		23630	177	133	26142	159	50
MX PRO 2 5P5 7027.160-7M		26490	204	129	29574	183	50
MX PRO 2 5P5 7027.180-7M		29260	231	126	32927	207	35
MX PRO 2 5P5 7027.200-7M		31980	259	123	36202	231	35
MX PRO 2 5P5 7027.060-8M		12520	86,5	144	13297	75,2	50
MX PRO 2 5P5 7027.070-8M		14500	100	145	15448	88,2	50
MX PRO 2 5P5 7027.080-8M		16410	114	143	17576	101	50
MX PRO 2 5P5 7027.090-8M		18260	128	142	19682	114	50
MX PRO 2 5P5 7027.100-8M		20060	142	141	21766	128	50
MX PRO 2 5P5 7027.120-8M		23510	171	137	25866	154	50
MX PRO 2 5P5 7027.140-8M		26810	200	134	29877	181	50
MX PRO 2 5P5 7027.160-8M		30000	231	129	33799	209	50
MX PRO 2 5P5 7027.180-8M		33120	263	125	37631	236	35
MX PRO 2 5P5 7027.200-8M		36210	297	121	41374	264	35
MX PRO 2 5P5 7027.060-9M		14090	97,6	144	14959	84,6	50
MX PRO 2 5P5 7027.070-9M		16320	113	144	17379	99,2	50
MX PRO 2 5P5 7027.080-9M		18470	129	143	19773	114	50
MX PRO 2 5P5 7027.090-9M		20550	144	142	22142	129	50
MX PRO 2 5P5 7027.100-9M		22570	160	141	24486	144	50
MX PRO 2 5P5 7027.120-9M		26450	192	137	29099	174	50
MX PRO 2 5P5 7027.140-9M		30160	225	134	33612	204	50
MX PRO 2 5P5 7027.160-9M		33740	259	130	38023	235	35
MX PRO 2 5P5 7027.180-9M		37250	296	125	42335	266	35
MX PRO 2 5P5 7027.200-9M		40730	334	121	46546	298	35
MX PRO 2 5P5 7027.060-5M	AS-55M AS-55N AS-55W	7520	53,4	140	8311	47	50
MX PRO 2 5P5 7027.070-5M		8710	62,2	140	9655	55,1	50
MX PRO 2 5P5 7027.080-5M		9880	71	139	10985	63,3	50
MX PRO 2 5P5 7027.090-5M		11030	79,7	138	12301	71,5	50
MX PRO 2 5P5 7027.100-5M		12160	88,6	137	13604	79,8	50
MX PRO 2 5P5 7027.120-5M		14360	107	134	16166	96,5	50
MX PRO 2 5P5 7027.140-5M		16490	125	131	18673	113	50
MX PRO 2 5P5 7027.160-5M		18540	144	128	21124	130	50
MX PRO 2 5P5 7027.180-5M		20530	164	125	23519	148	50
MX PRO 2 5P5 7027.200-5M		22450	185	121	25859	165	35
MX PRO 2 5P5 7027.060-6M		9020	63,9	141	9973	56,4	50
MX PRO 2 5P5 7027.070-6M		10450	74,3	140	11586	66,1	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7027.080-6M		11850	84,8	139	13182	75,9	50
MX PRO 2 5P5 7027.090-6M		13220	95,4	138	14762	85,8	50
MX PRO 2 5P5 7027.100-6M		14570	106	137	16324	95,7	50
MX PRO 2 5P5 7027.120-6M		17190	128	134	19399	116	50
MX PRO 2 5P5 7027.140-6M		19710	150	131	22408	136	50
MX PRO 2 5P5 7027.160-6M		22130	173	127	25349	157	50
MX PRO 2 5P5 7027.180-6M		24470	197	124	28223	177	50
MX PRO 2 5P5 7027.200-6M		26710	223	119	31031	198	35
MX PRO 2 5P5 7027.060-7M		10570	74,4	142	11635	65,8	50
MX PRO 2 5P5 7027.070-7M		12240	87	140	13517	77,2	50
MX PRO 2 5P5 7027.080-7M		13870	99,6	139	15379	88,6	50
MX PRO 2 5P5 7027.090-7M		15450	112	137	17222	100	50
MX PRO 2 5P5 7027.100-7M		16990	125	135	19045	112	50
MX PRO 2 5P5 7027.120-7M		19970	151	132	22633	135	50
MX PRO 2 5P5 7027.140-7M		22820	177	128	26142	159	50
MX PRO 2 5P5 7027.160-7M		25570	204	125	29574	183	50
MX PRO 2 5P5 7027.180-7M		28250	231	122	32927	207	35
MX PRO 2 5P5 7027.200-7M		30880	259	119	36202	231	35
MX PRO 2 5P5 7027.060-8M		12100	86,5	139	13297	75,2	50
MX PRO 2 5P5 7027.070-8M		14010	100	140	15448	88,2	50
MX PRO 2 5P5 7027.080-8M		15860	114	139	17576	101	50
MX PRO 2 5P5 7027.090-8M		17640	128	137	19682	114	50
MX PRO 2 5P5 7027.100-8M		19380	142	136	21766	128	50
MX PRO 2 5P5 7027.120-8M		22710	171	132	25866	154	50
MX PRO 2 5P5 7027.140-8M		25880	200	129	29877	181	50
MX PRO 2 5P5 7027.160-8M		28960	231	125	33799	209	50
MX PRO 2 5P5 7027.180-8M		31970	263	121	37631	236	35
MX PRO 2 5P5 7027.200-8M		34960	297	117	41374	264	35
MX PRO 2 5P5 7027.060-9M		13610	97,6	139	14959	84,6	50
MX PRO 2 5P5 7027.070-9M		15760	113	139	17379	99,2	50
MX PRO 2 5P5 7027.080-9M		17840	129	138	19773	114	50
MX PRO 2 5P5 7027.090-9M		19850	144	137	22142	129	50
MX PRO 2 5P5 7027.100-9M		21800	160	136	24486	144	50
MX PRO 2 5P5 7027.120-9M		25550	192	133	29099	174	50
MX PRO 2 5P5 7027.140-9M		29120	225	129	33612	204	50
MX PRO 2 5P5 7027.160-9M		32580	259	125	38023	235	35
MX PRO 2 5P5 7027.180-9M		35970	296	121	42335	266	35
MX PRO 2 5P5 7027.200-9M		39330	334	117	46546	298	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 5P5 2200K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7022.060-5M		7080	53,4	132	7480	47	50
MX PRO 2 5P5 7022.070-5M		8210	62,2	131	8689	55,1	50
MX PRO 2 5P5 7022.080-5M		9310	71	131	9887	63,3	50
MX PRO 2 5P5 7022.090-5M		10400	79,7	130	11071	71,5	50
MX PRO 2 5P5 7022.100-5M		11460	88,6	129	12243	79,8	50
MX PRO 2 5P5 7022.120-5M		13540	107	126	14550	96,5	50
MX PRO 2 5P5 7022.140-5M		15540	125	124	16806	113	50
MX PRO 2 5P5 7022.160-5M		17480	144	121	19012	130	50
MX PRO 2 5P5 7022.180-5M		19350	164	117	21167	148	50
MX PRO 2 5P5 7022.200-5M		21170	185	114	23273	165	35
MX PRO 2 5P5 7022.060-6M		8500	63,9	133	8976	56,4	50
MX PRO 2 5P5 7022.070-6M		9850	74,3	132	10427	66,1	50
MX PRO 2 5P5 7022.080-6M		11170	84,8	131	11864	75,9	50
MX PRO 2 5P5 7022.090-6M		12470	95,4	130	13285	85,8	50
MX PRO 2 5P5 7022.100-6M		13740	106	129	14692	95,7	50
MX PRO 2 5P5 7022.120-6M		16210	128	126	17459	116	50
MX PRO 2 5P5 7022.140-6M		18580	150	123	20167	136	50
MX PRO 2 5P5 7022.160-6M		20870	173	120	22814	157	50
MX PRO 2 5P5 7022.180-6M		23070	197	117	25401	177	50
MX PRO 2 5P5 7022.200-6M		25180	223	112	27928	198	35
MX PRO 2 5P5 7022.060-7M		9970	74,4	134	10472	65,8	50
MX PRO 2 5P5 7022.070-7M		11540	87	132	12165	77,2	50
MX PRO 2 5P5 7022.080-7M	STA	13080	99,6	131	13841	88,6	50
MX PRO 2 5P5 7022.090-7M	STA1	14570	112	130	15500	100	50
MX PRO 2 5P5 7022.100-7M	STU-S	16020	125	128	17140	112	50
MX PRO 2 5P5 7022.120-7M	S05	18830	151	124	20369	135	50
MX PRO 2 5P5 7022.140-7M	S07	21510	177	121	23528	159	50
MX PRO 2 5P5 7022.160-7M	STE-S	24110	204	118	26616	183	50
MX PRO 2 5P5 7022.180-7M		26630	231	115	29634	207	35
MX PRO 2 5P5 7022.200-7M		29110	259	112	32582	231	35
MX PRO 2 5P5 7022.060-8M		11410	86,5	131	11968	75,2	50
MX PRO 2 5P5 7022.070-8M		13210	100	132	13903	88,2	50
MX PRO 2 5P5 7022.080-8M		14950	114	131	15819	101	50
MX PRO 2 5P5 7022.090-8M		16630	128	129	17714	114	50
MX PRO 2 5P5 7022.100-8M		18270	142	128	19589	128	50
MX PRO 2 5P5 7022.120-8M		21410	171	125	23279	154	50
MX PRO 2 5P5 7022.140-8M		24410	200	122	26889	181	50
MX PRO 2 5P5 7022.160-8M		27300	231	118	30419	209	50
MX PRO 2 5P5 7022.180-8M		30140	263	114	33868	236	35
MX PRO 2 5P5 7022.200-8M		32960	297	110	37237	264	35
MX PRO 2 5P5 7022.060-9M		12830	97,6	131	13464	84,6	50
MX PRO 2 5P5 7022.070-9M		14850	113	131	15641	99,2	50
MX PRO 2 5P5 7022.080-9M		16810	129	130	17796	114	50
MX PRO 2 5P5 7022.090-9M		18710	144	129	19928	129	50
MX PRO 2 5P5 7022.100-9M		20550	160	128	22038	144	50
MX PRO 2 5P5 7022.120-9M		24080	192	125	26189	174	50
MX PRO 2 5P5 7022.140-9M		27460	225	122	30250	204	50
MX PRO 2 5P5 7022.160-9M		30720	259	118	34221	235	35
MX PRO 2 5P5 7022.180-9M		33910	296	114	38101	266	35
MX PRO 2 5P5 7022.200-9M		37080	334	111	41891	298	35
MX PRO 2 5P5 7022.060-5M		7240	53,4	135	7480	47	50
MX PRO 2 5P5 7022.070-5M		8390	62,2	134	8689	55,1	50
MX PRO 2 5P5 7022.080-5M		9520	71	134	9887	63,3	50
MX PRO 2 5P5 7022.090-5M		10630	79,7	133	11071	71,5	50
MX PRO 2 5P5 7022.100-5M		11720	88,6	132	12243	79,8	50
MX PRO 2 5P5 7022.120-5M		13850	107	129	14550	96,5	50
MX PRO 2 5P5 7022.140-5M		15900	125	127	16806	113	50
MX PRO 2 5P5 7022.160-5M		17880	144	124	19012	130	50
MX PRO 2 5P5 7022.180-5M	SV	19800	164	120	21167	148	50
MX PRO 2 5P5 7022.200-5M	STU-M	21640	185	116	23273	165	35
MX PRO 2 5P5 7022.060-6M	STE-M	8700	63,9	136	8976	56,4	50
MX PRO 2 5P5 7022.070-6M	STW	10080	74,3	135	10427	66,1	50
MX PRO 2 5P5 7022.080-6M		11430	84,8	134	11864	75,9	50
MX PRO 2 5P5 7022.090-6M		12750	95,4	133	13285	85,8	50
MX PRO 2 5P5 7022.100-6M		14050	106	132	14692	95,7	50
MX PRO 2 5P5 7022.120-6M		16580	128	129	17459	116	50
MX PRO 2 5P5 7022.140-6M		19000	150	126	20167	136	50
MX PRO 2 5P5 7022.160-6M		21340	173	123	22814	157	50
MX PRO 2 5P5 7022.180-6M		23590	197	119	25401	177	50
MX PRO 2 5P5 7022.200-6M		25760	223	115	27928	198	35

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 SP5 7022.060-7M		10200	74,4	137	10472	65,8	50
MX PRO 2 SP5 7022.070-7M		11810	87	135	12165	77,2	50
MX PRO 2 SP5 7022.080-7M		13380	99,6	134	13841	88,6	50
MX PRO 2 SP5 7022.090-7M		14900	112	133	15500	100	50
MX PRO 2 SP5 7022.100-7M		16390	125	131	17140	112	50
MX PRO 2 SP5 7022.120-7M		19250	151	127	20369	135	50
MX PRO 2 SP5 7022.140-7M		22000	177	124	23528	159	50
MX PRO 2 SP5 7022.160-7M		24650	204	120	26616	183	50
MX PRO 2 SP5 7022.180-7M		27240	231	117	29634	207	35
MX PRO 2 SP5 7022.200-7M		29780	259	114	32582	231	35
MX PRO 2 SP5 7022.060-8M		11660	86,5	134	11968	75,2	50
MX PRO 2 SP5 7022.070-8M		13500	100	135	13903	88,2	50
MX PRO 2 SP5 7022.080-8M		15280	114	134	15819	101	50
MX PRO 2 SP5 7022.090-8M		17010	128	132	17714	114	50
MX PRO 2 SP5 7022.100-8M		18680	142	131	19589	128	50
MX PRO 2 SP5 7022.120-8M		21890	171	128	23279	154	50
MX PRO 2 SP5 7022.140-8M		24960	200	124	26889	181	50
MX PRO 2 SP5 7022.160-8M		27930	231	120	30419	209	50
MX PRO 2 SP5 7022.180-8M		30830	263	117	33868	236	35
MX PRO 2 SP5 7022.200-8M		33710	297	113	37237	264	35
MX PRO 2 SP5 7022.060-9M		13120	97,6	134	13464	84,6	50
MX PRO 2 SP5 7022.070-9M		15200	113	134	15641	99,2	50
MX PRO 2 SP5 7022.080-9M		17200	129	133	17796	114	50
MX PRO 2 SP5 7022.090-9M		19140	144	132	19928	129	50
MX PRO 2 SP5 7022.100-9M		21020	160	131	22038	144	50
MX PRO 2 SP5 7022.120-9M		24630	192	128	26189	174	50
MX PRO 2 SP5 7022.140-9M		28080	225	124	30250	204	50
MX PRO 2 SP5 7022.160-9M		31420	259	121	34221	235	35
MX PRO 2 SP5 7022.180-9M		34680	296	117	38101	266	35
MX PRO 2 SP5 7022.200-9M		37920	334	113	41891	298	35
MX PRO 2 SP5 7022.060-5M		7080	53,4	132	7480	47	50
MX PRO 2 SP5 7022.070-5M		8210	62,2	131	8689	55,1	50
MX PRO 2 SP5 7022.080-5M		9310	71	131	9887	63,3	50
MX PRO 2 SP5 7022.090-5M		10400	79,7	130	11071	71,5	50
MX PRO 2 SP5 7022.100-5M		11460	88,6	129	12243	79,8	50
MX PRO 2 SP5 7022.120-5M		13540	107	126	14550	96,5	50
MX PRO 2 SP5 7022.140-5M		15540	125	124	16806	113	50
MX PRO 2 SP5 7022.160-5M		17480	144	121	19012	130	50
MX PRO 2 SP5 7022.180-5M		19350	164	117	21167	148	50
MX PRO 2 SP5 7022.200-5M		21170	185	114	23273	165	35
MX PRO 2 SP5 7022.060-6M		8500	63,9	133	8976	56,4	50
MX PRO 2 SP5 7022.070-6M		9850	74,3	132	10427	66,1	50
MX PRO 2 SP5 7022.080-6M		11170	84,8	131	11864	75,9	50
MX PRO 2 SP5 7022.090-6M		12470	95,4	130	13285	85,8	50
MX PRO 2 SP5 7022.100-6M		13740	106	129	14692	95,7	50
MX PRO 2 SP5 7022.120-6M		16210	128	126	17459	116	50
MX PRO 2 SP5 7022.140-6M		18580	150	123	20167	136	50
MX PRO 2 SP5 7022.160-6M		20870	173	120	22814	157	50
MX PRO 2 SP5 7022.180-6M		23070	197	117	25401	177	50
MX PRO 2 SP5 7022.200-6M	AS-45M	25180	223	112	27928	198	35
MX PRO 2 SP5 7022.060-7M	AS-45N	9970	74,4	134	10472	65,8	50
MX PRO 2 SP5 7022.070-7M	AS-45W	11540	87	132	12165	77,2	50
MX PRO 2 SP5 7022.080-7M		13080	99,6	131	13841	88,6	50
MX PRO 2 SP5 7022.090-7M		14570	112	130	15500	100	50
MX PRO 2 SP5 7022.100-7M		16020	125	128	17140	112	50
MX PRO 2 SP5 7022.120-7M		18830	151	124	20369	135	50
MX PRO 2 SP5 7022.140-7M		21510	177	121	23528	159	50
MX PRO 2 SP5 7022.160-7M		24110	204	118	26616	183	50
MX PRO 2 SP5 7022.180-7M		26630	231	115	29634	207	35
MX PRO 2 SP5 7022.200-7M		29110	259	112	32582	231	35
MX PRO 2 SP5 7022.060-8M		11410	86,5	131	11968	75,2	50
MX PRO 2 SP5 7022.070-8M		13210	100	132	13903	88,2	50
MX PRO 2 SP5 7022.080-8M		14950	114	131	15819	101	50
MX PRO 2 SP5 7022.090-8M		16630	128	129	17714	114	50
MX PRO 2 SP5 7022.100-8M		18270	142	128	19589	128	50
MX PRO 2 SP5 7022.120-8M		21410	171	125	23279	154	50
MX PRO 2 SP5 7022.140-8M		24410	200	122	26889	181	50
MX PRO 2 SP5 7022.160-8M		27300	231	118	30419	209	50
MX PRO 2 SP5 7022.180-8M		30140	263	114	33868	236	35
MX PRO 2 SP5 7022.200-8M		32960	297	110	37237	264	35
MX PRO 2 SP5 7022.060-9M		12830	97,6	131	13464	84,6	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7022.070-9M		14850	113	131	15641	99,2	50
MX PRO 2 5P5 7022.080-9M		16810	129	130	17796	114	50
MX PRO 2 5P5 7022.090-9M		18710	144	129	19928	129	50
MX PRO 2 5P5 7022.100-9M		20550	160	128	22038	144	50
MX PRO 2 5P5 7022.120-9M		24080	192	125	26189	174	50
MX PRO 2 5P5 7022.140-9M		27460	225	122	30250	204	50
MX PRO 2 5P5 7022.160-9M		30720	259	118	34221	235	35
MX PRO 2 5P5 7022.180-9M		33910	296	114	38101	266	35
MX PRO 2 5P5 7022.200-9M		37080	334	111	41891	298	35
MX PRO 2 5P5 7022.060-5M		7000	53,4	131	7480	47	50
MX PRO 2 5P5 7022.070-5M		8120	62,2	130	8689	55,1	50
MX PRO 2 5P5 7022.080-5M		9210	71	129	9887	63,3	50
MX PRO 2 5P5 7022.090-5M		10280	79,7	128	11071	71,5	50
MX PRO 2 5P5 7022.100-5M		11330	88,6	127	12243	79,8	50
MX PRO 2 5P5 7022.120-5M		13380	107	125	14550	96,5	50
MX PRO 2 5P5 7022.140-5M		15370	125	122	16806	113	50
MX PRO 2 5P5 7022.160-5M		17280	144	120	19012	130	50
MX PRO 2 5P5 7022.180-5M		19130	164	116	21167	148	50
MX PRO 2 5P5 7022.200-5M		20920	185	113	23273	165	35
MX PRO 2 5P5 7022.060-6M		8410	63,9	131	8976	56,4	50
MX PRO 2 5P5 7022.070-6M		9740	74,3	131	10427	66,1	50
MX PRO 2 5P5 7022.080-6M		11050	84,8	130	11864	75,9	50
MX PRO 2 5P5 7022.090-6M		12330	95,4	129	13285	85,8	50
MX PRO 2 5P5 7022.100-6M		13580	106	128	14692	95,7	50
MX PRO 2 5P5 7022.120-6M		16020	128	125	17459	116	50
MX PRO 2 5P5 7022.140-6M		18370	150	122	20167	136	50
MX PRO 2 5P5 7022.160-6M		20630	173	119	22814	157	50
MX PRO 2 5P5 7022.180-6M		22800	197	115	25401	177	50
MX PRO 2 5P5 7022.200-6M		24900	223	111	27928	198	35
MX PRO 2 5P5 7022.060-7M		9850	74,4	132	10472	65,8	50
MX PRO 2 5P5 7022.070-7M		11410	87	131	12165	77,2	50
MX PRO 2 5P5 7022.080-7M		12920	99,6	129	13841	88,6	50
MX PRO 2 5P5 7022.090-7M		14400	112	128	15500	100	50
MX PRO 2 5P5 7022.100-7M		15840	125	126	17140	112	50
MX PRO 2 5P5 7022.120-7M		18610	151	123	20369	135	50
MX PRO 2 5P5 7022.140-7M		21270	177	120	23528	159	50
MX PRO 2 5P5 7022.160-7M		23840	204	116	26616	183	50
MX PRO 2 5P5 7022.180-7M		26330	231	113	29634	207	35
MX PRO 2 5P5 7022.200-7M		28780	259	111	32582	231	35
MX PRO 2 5P5 7022.060-8M		11270	86,5	130	11968	75,2	50
MX PRO 2 5P5 7022.070-8M		13050	100	130	13903	88,2	50
MX PRO 2 5P5 7022.080-8M		14770	114	129	15819	101	50
MX PRO 2 5P5 7022.090-8M		16440	128	128	17714	114	50
MX PRO 2 5P5 7022.100-8M		18050	142	127	19589	128	50
MX PRO 2 5P5 7022.120-8M		21160	171	123	23279	154	50
MX PRO 2 5P5 7022.140-8M		24130	200	120	26889	181	50
MX PRO 2 5P5 7022.160-8M		27000	231	116	30419	209	50
MX PRO 2 5P5 7022.180-8M		29800	263	113	33868	236	35
MX PRO 2 5P5 7022.200-8M		32590	297	109	37237	264	35
MX PRO 2 5P5 7022.060-9M		12680	97,6	129	13464	84,6	50
MX PRO 2 5P5 7022.070-9M		14690	113	130	15641	99,2	50
MX PRO 2 5P5 7022.080-9M		16620	129	128	17796	114	50
MX PRO 2 5P5 7022.090-9M		18500	144	128	19928	129	50
MX PRO 2 5P5 7022.100-9M		20310	160	126	22038	144	50
MX PRO 2 5P5 7022.120-9M		23810	192	124	26189	174	50
MX PRO 2 5P5 7022.140-9M		27140	225	120	30250	204	50
MX PRO 2 5P5 7022.160-9M		30370	259	117	34221	235	35
MX PRO 2 5P5 7022.180-9M		33530	296	113	38101	266	35
MX PRO 2 5P5 7022.200-9M		36660	334	109	41891	298	35
MX PRO 2 5P5 7022.060-5M	AS-55M AS-55N AS-55W	6760	53,4	126	7480	47	50
MX PRO 2 5P5 7022.070-5M		7840	62,2	126	8689	55,1	50
MX PRO 2 5P5 7022.080-5M		8890	71	125	9887	63,3	50
MX PRO 2 5P5 7022.090-5M		9930	79,7	124	11071	71,5	50
MX PRO 2 5P5 7022.100-5M		10940	88,6	123	12243	79,8	50
MX PRO 2 5P5 7022.120-5M		12930	107	120	14550	96,5	50
MX PRO 2 5P5 7022.140-5M		14840	125	118	16806	113	50
MX PRO 2 5P5 7022.160-5M		16690	144	115	19012	130	50
MX PRO 2 5P5 7022.180-5M		18470	164	112	21167	148	50
MX PRO 2 5P5 7022.200-5M		20200	185	109	23273	165	35
MX PRO 2 5P5 7022.060-6M		8120	63,9	127	8976	56,4	50
MX PRO 2 5P5 7022.070-6M		9400	74,3	126	10427	66,1	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 5P5 7022.080-6M		10660	84,8	125	11864	75,9	50
MX PRO 2 5P5 7022.090-6M		11900	95,4	124	13285	85,8	50
MX PRO 2 5P5 7022.100-6M		13110	106	123	14692	95,7	50
MX PRO 2 5P5 7022.120-6M		15470	128	120	17459	116	50
MX PRO 2 5P5 7022.140-6M		17740	150	118	20167	136	50
MX PRO 2 5P5 7022.160-6M		19920	173	115	22814	157	50
MX PRO 2 5P5 7022.180-6M		22020	197	111	25401	177	50
MX PRO 2 5P5 7022.200-6M		24040	223	107	27928	198	35
MX PRO 2 5P5 7022.060-7M		9510	74,4	127	10472	65,8	50
MX PRO 2 5P5 7022.070-7M		11020	87	126	12165	77,2	50
MX PRO 2 5P5 7022.080-7M		12480	99,6	125	13841	88,6	50
MX PRO 2 5P5 7022.090-7M		13910	112	124	15500	100	50
MX PRO 2 5P5 7022.100-7M		15290	125	122	17140	112	50
MX PRO 2 5P5 7022.120-7M		17970	151	119	20369	135	50
MX PRO 2 5P5 7022.140-7M		20530	177	115	23528	159	50
MX PRO 2 5P5 7022.160-7M		23010	204	112	26616	183	50
MX PRO 2 5P5 7022.180-7M		25420	231	110	29634	207	35
MX PRO 2 5P5 7022.200-7M		27790	259	107	32582	231	35
MX PRO 2 5P5 7022.060-8M		10890	86,5	125	11968	75,2	50
MX PRO 2 5P5 7022.070-8M		12610	100	126	13903	88,2	50
MX PRO 2 5P5 7022.080-8M		14270	114	125	15819	101	50
MX PRO 2 5P5 7022.090-8M		15880	128	124	17714	114	50
MX PRO 2 5P5 7022.100-8M		17440	142	122	19589	128	50
MX PRO 2 5P5 7022.120-8M		20430	171	119	23279	154	50
MX PRO 2 5P5 7022.140-8M		23300	200	116	26889	181	50
MX PRO 2 5P5 7022.160-8M		26060	231	112	30419	209	50
MX PRO 2 5P5 7022.180-8M		28770	263	109	33868	236	35
MX PRO 2 5P5 7022.200-8M		31460	297	105	37237	264	35
MX PRO 2 5P5 7022.060-9M		12250	97,6	125	13464	84,6	50
MX PRO 2 5P5 7022.070-9M		14180	113	125	15641	99,2	50
MX PRO 2 5P5 7022.080-9M		16050	129	124	17796	114	50
MX PRO 2 5P5 7022.090-9M		17860	144	124	19928	129	50
MX PRO 2 5P5 7022.100-9M		19620	160	122	22038	144	50
MX PRO 2 5P5 7022.120-9M		22990	192	119	26189	174	50
MX PRO 2 5P5 7022.140-9M		26210	225	116	30250	204	50
MX PRO 2 5P5 7022.160-9M		29320	259	113	34221	235	35
MX PRO 2 5P5 7022.180-9M		32370	296	109	38101	266	35
MX PRO 2 5P5 7022.200-9M		35400	334	105	41891	298	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 4P4 4000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7040.080-5M	S05 S07 STE-S	9200	57,2	160	9765	50,6	50
MX PRO 2 4P4 7040.090-5M		10270	64,1	160	10934	57,2	50
MX PRO 2 4P4 7040.100-5M		11320	71,1	159	12092	63,8	50
MX PRO 2 4P4 7040.120-5M		13370	85,3	156	14370	77,2	50
MX PRO 2 4P4 7040.140-5M		15350	100	153	16598	90,7	50
MX PRO 2 4P4 7040.160-5M		17260	115	150	18777	104	50
MX PRO 2 4P4 7040.180-5M		19110	131	145	20906	118	50
MX PRO 2 4P4 7040.200-5M		20900	148	141	22986	132	35
MX PRO 2 4P4 7040.080-6M		11040	68,4	161	11717	60,8	50
MX PRO 2 4P4 7040.090-6M		12320	76,7	160	13121	68,6	50
MX PRO 2 4P4 7040.100-6M		13570	85,1	159	14510	76,6	50
MX PRO 2 4P4 7040.120-6M		16010	102	156	17244	92,6	50
MX PRO 2 4P4 7040.140-6M		18350	120	152	19918	109	50
MX PRO 2 4P4 7040.160-6M		20610	138	149	22532	125	50
MX PRO 2 4P4 7040.180-6M		22780	158	144	25087	142	50
MX PRO 2 4P4 7040.200-6M		24870	178	139	27583	159	35
MX PRO 2 4P4 7040.080-7M		12910	79,7	161	13670	70,9	50
MX PRO 2 4P4 7040.090-7M		14380	89,8	160	15308	80,1	50
MX PRO 2 4P4 7040.100-7M		15820	100	158	16929	89,4	50
MX PRO 2 4P4 7040.120-7M		18590	121	153	20118	108	50
MX PRO 2 4P4 7040.140-7M		21250	142	149	23238	127	50
MX PRO 2 4P4 7040.160-7M		23810	164	145	26288	146	50
MX PRO 2 4P4 7040.180-7M		26310	185	142	29269	166	35
MX PRO 2 4P4 7040.200-7M		28750	207	138	32180	185	35
MX PRO 2 4P4 7040.080-8M		14760	92	160	15623	81	50
MX PRO 2 4P4 7040.090-8M		16430	103	159	17495	91,5	50
MX PRO 2 4P4 7040.100-8M		18040	114	158	19347	102	50
MX PRO 2 4P4 7040.120-8M		21140	137	154	22992	123	50
MX PRO 2 4P4 7040.140-8M		24100	160	150	26557	145	50
MX PRO 2 4P4 7040.160-8M		26960	185	145	30043	167	50
MX PRO 2 4P4 7040.180-8M		29770	210	141	33450	189	35
MX PRO 2 4P4 7040.200-8M		32550	238	136	36777	212	35
MX PRO 2 4P4 7040.080-9M		16600	104	159	17576	91,1	50
MX PRO 2 4P4 7040.090-9M		18470	116	159	19682	103	50
MX PRO 2 4P4 7040.100-9M		20290	129	157	21766	115	50
MX PRO 2 4P4 7040.120-9M		23780	155	153	25866	139	50
MX PRO 2 4P4 7040.140-9M		27110	181	149	29877	163	50
MX PRO 2 4P4 7040.160-9M		30330	208	145	33799	188	35
MX PRO 2 4P4 7040.180-9M		33490	237	141	37631	213	35
MX PRO 2 4P4 7040.200-9M		36620	267	137	41374	238	35
MX PRO 2 4P4 7040.080-5M	STA STA1 STU-S	9300	57,2	162	9765	50,6	50
MX PRO 2 4P4 7040.090-5M		10380	64,1	161	10934	57,2	50
MX PRO 2 4P4 7040.100-5M		11450	71,1	161	12092	63,8	50
MX PRO 2 4P4 7040.120-5M		13530	85,3	158	14370	77,2	50
MX PRO 2 4P4 7040.140-5M		15530	100	155	16598	90,7	50
MX PRO 2 4P4 7040.160-5M		17470	115	151	18777	104	50
MX PRO 2 4P4 7040.180-5M		19330	131	147	20906	118	50
MX PRO 2 4P4 7040.200-5M		21140	148	142	22986	132	35
MX PRO 2 4P4 7040.080-6M		11160	68,4	163	11717	60,8	50
MX PRO 2 4P4 7040.090-6M		12450	76,7	162	13121	68,6	50
MX PRO 2 4P4 7040.100-6M		13720	85,1	161	14510	76,6	50
MX PRO 2 4P4 7040.120-6M		16190	102	158	17244	92,6	50
MX PRO 2 4P4 7040.140-6M		18560	120	154	19918	109	50
MX PRO 2 4P4 7040.160-6M		20840	138	151	22532	125	50
MX PRO 2 4P4 7040.180-6M		23040	158	145	25087	142	50
MX PRO 2 4P4 7040.200-6M		25160	178	141	27583	159	35
MX PRO 2 4P4 7040.080-7M		13070	79,7	163	13670	70,9	50
MX PRO 2 4P4 7040.090-7M		14560	89,8	162	15308	80,1	50
MX PRO 2 4P4 7040.100-7M		16010	100	160	16929	89,4	50
MX PRO 2 4P4 7040.120-7M		18810	121	155	20118	108	50
MX PRO 2 4P4 7040.140-7M		21490	142	151	23238	127	50
MX PRO 2 4P4 7040.160-7M		24080	164	146	26288	146	50
MX PRO 2 4P4 7040.180-7M		26600	185	143	29269	166	35
MX PRO 2 4P4 7040.200-7M		29080	207	140	32180	185	35
MX PRO 2 4P4 7040.080-8M		14930	92	162	15623	81	50
MX PRO 2 4P4 7040.090-8M		16620	103	161	17495	91,5	50
MX PRO 2 4P4 7040.100-8M		18250	114	160	19347	102	50
MX PRO 2 4P4 7040.120-8M		21380	137	156	22992	123	50
MX PRO 2 4P4 7040.140-8M		24380	160	152	26557	145	50
MX PRO 2 4P4 7040.160-8M		27280	185	147	30043	167	50

AEC Illuminazione
www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7040.180-8M		30110	210	143	33450	189	35
MX PRO 2 4P4 7040.200-8M		32930	238	138	36777	212	35
MX PRO 2 4P4 7040.080-9M		16800	104	161	17576	91,1	50
MX PRO 2 4P4 7040.090-9M		18690	116	161	19682	103	50
MX PRO 2 4P4 7040.100-9M		20530	129	159	21766	115	50
MX PRO 2 4P4 7040.120-9M		24060	155	155	25866	139	50
MX PRO 2 4P4 7040.140-9M		27430	181	151	29877	163	50
MX PRO 2 4P4 7040.160-9M		30690	208	147	33799	188	35
MX PRO 2 4P4 7040.180-9M		33880	237	142	37631	213	35
MX PRO 2 4P4 7040.200-9M		37040	267	138	41374	238	35
MX PRO 2 4P4 7040.080-5M		9510	57,2	166	9765	50,6	50
MX PRO 2 4P4 7040.090-5M		10620	64,1	165	10934	57,2	50
MX PRO 2 4P4 7040.100-5M		11710	71,1	164	12092	63,8	50
MX PRO 2 4P4 7040.120-5M		13840	85,3	162	14370	77,2	50
MX PRO 2 4P4 7040.140-5M		15890	100	158	16598	90,7	50
MX PRO 2 4P4 7040.160-5M		17870	115	155	18777	104	50
MX PRO 2 4P4 7040.180-5M		19790	131	151	20906	118	50
MX PRO 2 4P4 7040.200-5M		21630	148	146	22986	132	35
MX PRO 2 4P4 7040.080-6M		11420	68,4	166	11717	60,8	50
MX PRO 2 4P4 7040.090-6M		12740	76,7	166	13121	68,6	50
MX PRO 2 4P4 7040.100-6M		14040	85,1	164	14510	76,6	50
MX PRO 2 4P4 7040.120-6M		16560	102	162	17244	92,6	50
MX PRO 2 4P4 7040.140-6M		18990	120	158	19918	109	50
MX PRO 2 4P4 7040.160-6M		21330	138	154	22532	125	50
MX PRO 2 4P4 7040.180-6M		23570	158	149	25087	142	50
MX PRO 2 4P4 7040.200-6M		25740	178	144	27583	159	35
MX PRO 2 4P4 7040.080-7M		13360	79,7	167	13670	70,9	50
MX PRO 2 4P4 7040.090-7M		14880	89,8	165	15308	80,1	50
MX PRO 2 4P4 7040.100-7M	SV	16370	100	163	16929	89,4	50
MX PRO 2 4P4 7040.120-7M	STU-M	19240	121	159	20118	108	50
MX PRO 2 4P4 7040.140-7M	STE-M	21990	142	154	23238	127	50
MX PRO 2 4P4 7040.160-7M	STW	24640	164	150	26288	146	50
MX PRO 2 4P4 7040.180-7M		27220	185	147	29269	166	35
MX PRO 2 4P4 7040.200-7M		29750	207	143	32180	185	35
MX PRO 2 4P4 7040.080-8M		15280	92	166	15623	81	50
MX PRO 2 4P4 7040.090-8M		17000	103	165	17495	91,5	50
MX PRO 2 4P4 7040.100-8M		18670	114	163	19347	102	50
MX PRO 2 4P4 7040.120-8M		21880	137	159	22992	123	50
MX PRO 2 4P4 7040.140-8M		24940	160	155	26557	145	50
MX PRO 2 4P4 7040.160-8M		27900	185	150	30043	167	50
MX PRO 2 4P4 7040.180-8M		30800	210	146	33450	189	35
MX PRO 2 4P4 7040.200-8M		33680	238	141	36777	212	35
MX PRO 2 4P4 7040.080-9M		17180	104	165	17576	91,1	50
MX PRO 2 4P4 7040.090-9M		19120	116	164	19682	103	50
MX PRO 2 4P4 7040.100-9M		21000	129	162	21766	115	50
MX PRO 2 4P4 7040.120-9M		24610	155	158	25866	139	50
MX PRO 2 4P4 7040.140-9M		28060	181	155	29877	163	50
MX PRO 2 4P4 7040.160-9M		31390	208	150	33799	188	35
MX PRO 2 4P4 7040.180-9M		34650	237	146	37631	213	35
MX PRO 2 4P4 7040.200-9M		37890	267	141	41374	238	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 4P4 3000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7030.080-5M	S05 S07 STE-S	8650	57,2	151	9179	50,6	50
MX PRO 2 4P4 7030.090-5M		9650	64,1	150	10278	57,2	50
MX PRO 2 4P4 7030.100-5M		10640	71,1	149	11367	63,8	50
MX PRO 2 4P4 7030.120-5M		12570	85,3	147	13508	77,2	50
MX PRO 2 4P4 7030.140-5M		14430	100	144	15602	90,7	50
MX PRO 2 4P4 7030.160-5M		16230	115	141	17650	104	50
MX PRO 2 4P4 7030.180-5M		17970	131	137	19652	118	50
MX PRO 2 4P4 7030.200-5M		19650	148	132	21606	132	35
MX PRO 2 4P4 7030.080-6M		10370	68,4	151	11014	60,8	50
MX PRO 2 4P4 7030.090-6M		11580	76,7	150	12334	68,6	50
MX PRO 2 4P4 7030.100-6M		12760	85,1	149	13640	76,6	50
MX PRO 2 4P4 7030.120-6M		15050	102	147	16209	92,6	50
MX PRO 2 4P4 7030.140-6M		17250	120	143	18723	109	50
MX PRO 2 4P4 7030.160-6M		19370	138	140	21180	125	50
MX PRO 2 4P4 7030.180-6M		21410	158	135	23582	142	50
MX PRO 2 4P4 7030.200-6M		23380	178	131	25928	159	35
MX PRO 2 4P4 7030.080-7M		12130	79,7	152	12850	70,9	50
MX PRO 2 4P4 7030.090-7M		13520	89,8	150	14390	80,1	50
MX PRO 2 4P4 7030.100-7M		14870	100	148	15913	89,4	50
MX PRO 2 4P4 7030.120-7M		17480	121	144	18911	108	50
MX PRO 2 4P4 7030.140-7M		19980	142	140	21843	127	50
MX PRO 2 4P4 7030.160-7M		22380	164	136	24711	146	50
MX PRO 2 4P4 7030.180-7M		24730	185	133	27512	166	35
MX PRO 2 4P4 7030.200-7M		27030	207	130	30249	185	35
MX PRO 2 4P4 7030.080-8M		13880	92	150	14686	81	50
MX PRO 2 4P4 7030.090-8M		15440	103	149	16445	91,5	50
MX PRO 2 4P4 7030.100-8M		16960	114	148	18186	102	50
MX PRO 2 4P4 7030.120-8M		19870	137	145	21612	123	50
MX PRO 2 4P4 7030.140-8M		22650	160	141	24964	145	50
MX PRO 2 4P4 7030.160-8M		25340	185	136	28241	167	50
MX PRO 2 4P4 7030.180-8M		27980	210	133	31443	189	35
MX PRO 2 4P4 7030.200-8M		30600	238	128	34570	212	35
MX PRO 2 4P4 7030.080-9M		15610	104	150	16522	91,1	50
MX PRO 2 4P4 7030.090-9M		17370	116	149	18501	103	50
MX PRO 2 4P4 7030.100-9M		19070	129	147	20460	115	50
MX PRO 2 4P4 7030.120-9M		22350	155	144	24314	139	50
MX PRO 2 4P4 7030.140-9M		25480	181	140	28084	163	50
MX PRO 2 4P4 7030.160-9M		28510	208	137	31771	188	35
MX PRO 2 4P4 7030.180-9M		31480	237	132	35373	213	35
MX PRO 2 4P4 7030.200-9M		34420	267	128	38892	238	35
MX PRO 2 4P4 7030.080-5M	STA STA1 STU-S	8740	57,2	152	9179	50,6	50
MX PRO 2 4P4 7030.090-5M		9760	64,1	152	10278	57,2	50
MX PRO 2 4P4 7030.100-5M		10760	71,1	151	11367	63,8	50
MX PRO 2 4P4 7030.120-5M		12710	85,3	149	13508	77,2	50
MX PRO 2 4P4 7030.140-5M		14600	100	146	15602	90,7	50
MX PRO 2 4P4 7030.160-5M		16420	115	142	17650	104	50
MX PRO 2 4P4 7030.180-5M		18170	131	138	19652	118	50
MX PRO 2 4P4 7030.200-5M		19870	148	134	21606	132	35
MX PRO 2 4P4 7030.080-6M		10490	68,4	153	11014	60,8	50
MX PRO 2 4P4 7030.090-6M		11700	76,7	152	12334	68,6	50
MX PRO 2 4P4 7030.100-6M		12900	85,1	151	13640	76,6	50
MX PRO 2 4P4 7030.120-6M		15220	102	149	16209	92,6	50
MX PRO 2 4P4 7030.140-6M		17450	120	145	18723	109	50
MX PRO 2 4P4 7030.160-6M		19590	138	141	21180	125	50
MX PRO 2 4P4 7030.180-6M		21660	158	137	23582	142	50
MX PRO 2 4P4 7030.200-6M		23650	178	132	25928	159	35
MX PRO 2 4P4 7030.080-7M		12280	79,7	154	12850	70,9	50
MX PRO 2 4P4 7030.090-7M		13690	89,8	152	14390	80,1	50
MX PRO 2 4P4 7030.100-7M		15050	100	150	15913	89,4	50
MX PRO 2 4P4 7030.120-7M		17680	121	146	18911	108	50
MX PRO 2 4P4 7030.140-7M		20200	142	142	21843	127	50
MX PRO 2 4P4 7030.160-7M		22630	164	137	24711	146	50
MX PRO 2 4P4 7030.180-7M		25000	185	135	27512	166	35
MX PRO 2 4P4 7030.200-7M		27340	207	132	30249	185	35
MX PRO 2 4P4 7030.080-8M		14040	92	152	14686	81	50
MX PRO 2 4P4 7030.090-8M		15620	103	151	16445	91,5	50
MX PRO 2 4P4 7030.100-8M		17160	114	150	18186	102	50
MX PRO 2 4P4 7030.120-8M		20100	137	146	21612	123	50
MX PRO 2 4P4 7030.140-8M		22920	160	143	24964	145	50
MX PRO 2 4P4 7030.160-8M		25640	185	138	28241	167	50

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7030.180-8M		28310	210	134	31443	189	35
MX PRO 2 4P4 7030.200-8M		30950	238	130	34570	212	35
MX PRO 2 4P4 7030.080-9M		15790	104	151	16522	91,1	50
MX PRO 2 4P4 7030.090-9M		17570	116	151	18501	103	50
MX PRO 2 4P4 7030.100-9M		19300	129	149	20460	115	50
MX PRO 2 4P4 7030.120-9M		22620	155	145	24314	139	50
MX PRO 2 4P4 7030.140-9M		25780	181	142	28084	163	50
MX PRO 2 4P4 7030.160-9M		28850	208	138	31771	188	35
MX PRO 2 4P4 7030.180-9M		31840	237	134	35373	213	35
MX PRO 2 4P4 7030.200-9M		34820	267	130	38892	238	35
MX PRO 2 4P4 7030.080-5M		8940	57,2	156	9179	50,6	50
MX PRO 2 4P4 7030.090-5M		9980	64,1	155	10278	57,2	50
MX PRO 2 4P4 7030.100-5M		11010	71,1	154	11367	63,8	50
MX PRO 2 4P4 7030.120-5M		13010	85,3	152	13508	77,2	50
MX PRO 2 4P4 7030.140-5M		14940	100	149	15602	90,7	50
MX PRO 2 4P4 7030.160-5M		16800	115	146	17650	104	50
MX PRO 2 4P4 7030.180-5M		18600	131	141	19652	118	50
MX PRO 2 4P4 7030.200-5M		20330	148	137	21606	132	35
MX PRO 2 4P4 7030.080-6M		10730	68,4	156	11014	60,8	50
MX PRO 2 4P4 7030.090-6M		11980	76,7	156	12334	68,6	50
MX PRO 2 4P4 7030.100-6M		13200	85,1	155	13640	76,6	50
MX PRO 2 4P4 7030.120-6M		15570	102	152	16209	92,6	50
MX PRO 2 4P4 7030.140-6M		17850	120	148	18723	109	50
MX PRO 2 4P4 7030.160-6M		20050	138	145	21180	125	50
MX PRO 2 4P4 7030.180-6M		22160	158	140	23582	142	50
MX PRO 2 4P4 7030.200-6M		24200	178	135	25928	159	35
MX PRO 2 4P4 7030.080-7M		12560	79,7	157	12850	70,9	50
MX PRO 2 4P4 7030.090-7M		13990	89,8	155	14390	80,1	50
MX PRO 2 4P4 7030.100-7M	SV	15390	100	153	15913	89,4	50
MX PRO 2 4P4 7030.120-7M	STU-M	18090	121	149	18911	108	50
MX PRO 2 4P4 7030.140-7M	STE-M	20670	142	145	21843	127	50
MX PRO 2 4P4 7030.160-7M	STW	23160	164	141	24711	146	50
MX PRO 2 4P4 7030.180-7M		25590	185	138	27512	166	35
MX PRO 2 4P4 7030.200-7M		27970	207	135	30249	185	35
MX PRO 2 4P4 7030.080-8M		14360	92	156	14686	81	50
MX PRO 2 4P4 7030.090-8M		15980	103	155	16445	91,5	50
MX PRO 2 4P4 7030.100-8M		17550	114	153	18186	102	50
MX PRO 2 4P4 7030.120-8M		20560	137	150	21612	123	50
MX PRO 2 4P4 7030.140-8M		23440	160	146	24964	145	50
MX PRO 2 4P4 7030.160-8M		26230	185	141	28241	167	50
MX PRO 2 4P4 7030.180-8M		28950	210	137	31443	189	35
MX PRO 2 4P4 7030.200-8M		31660	238	133	34570	212	35
MX PRO 2 4P4 7030.080-9M		16150	104	155	16522	91,1	50
MX PRO 2 4P4 7030.090-9M		17970	116	154	18501	103	50
MX PRO 2 4P4 7030.100-9M		19740	129	153	20460	115	50
MX PRO 2 4P4 7030.120-9M		23130	155	149	24314	139	50
MX PRO 2 4P4 7030.140-9M		26380	181	145	28084	163	50
MX PRO 2 4P4 7030.160-9M		29510	208	141	31771	188	35
MX PRO 2 4P4 7030.180-9M		32570	237	137	35373	213	35
MX PRO 2 4P4 7030.200-9M		35620	267	133	38892	238	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 4P4 2700K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7027.080-5M	S05 S07 STE-S	8280	57,2	144	8788	50,6	50
MX PRO 2 4P4 7027.090-5M		9240	64,1	144	9841	57,2	50
MX PRO 2 4P4 7027.100-5M		10190	71,1	143	10883	63,8	50
MX PRO 2 4P4 7027.120-5M		12030	85,3	141	12933	77,2	50
MX PRO 2 4P4 7027.140-5M		13820	100	138	14938	90,7	50
MX PRO 2 4P4 7027.160-5M		15540	115	135	16899	104	50
MX PRO 2 4P4 7027.180-5M		17200	131	131	18816	118	50
MX PRO 2 4P4 7027.200-5M		18810	148	127	20687	132	35
MX PRO 2 4P4 7027.080-6M		9930	68,4	145	10546	60,8	50
MX PRO 2 4P4 7027.090-6M		11080	76,7	144	11809	68,6	50
MX PRO 2 4P4 7027.100-6M		12210	85,1	143	13059	76,6	50
MX PRO 2 4P4 7027.120-6M		14410	102	141	15520	92,6	50
MX PRO 2 4P4 7027.140-6M		16520	120	137	17926	109	50
MX PRO 2 4P4 7027.160-6M		18540	138	134	20279	125	50
MX PRO 2 4P4 7027.180-6M		20500	158	129	22579	142	50
MX PRO 2 4P4 7027.200-6M		22380	178	125	24824	159	35
MX PRO 2 4P4 7027.080-7M		11620	79,7	145	12303	70,9	50
MX PRO 2 4P4 7027.090-7M		12940	89,8	144	13777	80,1	50
MX PRO 2 4P4 7027.100-7M		14240	100	142	15236	89,4	50
MX PRO 2 4P4 7027.120-7M		16730	121	138	18106	108	50
MX PRO 2 4P4 7027.140-7M		19130	142	134	20914	127	50
MX PRO 2 4P4 7027.160-7M		21430	164	130	23659	146	50
MX PRO 2 4P4 7027.180-7M		23680	185	128	26342	166	35
MX PRO 2 4P4 7027.200-7M		25880	207	125	28962	185	35
MX PRO 2 4P4 7027.080-8M		13290	92	144	14061	81	50
MX PRO 2 4P4 7027.090-8M		14780	103	143	15746	91,5	50
MX PRO 2 4P4 7027.100-8M		16240	114	142	17413	102	50
MX PRO 2 4P4 7027.120-8M		19030	137	138	20693	123	50
MX PRO 2 4P4 7027.140-8M		21690	160	135	23902	145	50
MX PRO 2 4P4 7027.160-8M		24270	185	131	27039	167	50
MX PRO 2 4P4 7027.180-8M		26790	210	127	30105	189	35
MX PRO 2 4P4 7027.200-8M		29300	238	123	33099	212	35
MX PRO 2 4P4 7027.080-9M		14940	104	143	15819	91,1	50
MX PRO 2 4P4 7027.090-9M		16630	116	143	17714	103	50
MX PRO 2 4P4 7027.100-9M		18260	129	141	19589	115	50
MX PRO 2 4P4 7027.120-9M		21400	155	138	23279	139	50
MX PRO 2 4P4 7027.140-9M		24400	181	134	26889	163	50
MX PRO 2 4P4 7027.160-9M		27300	208	131	30419	188	35
MX PRO 2 4P4 7027.180-9M		30140	237	127	33868	213	35
MX PRO 2 4P4 7027.200-9M		32960	267	123	37237	238	35
MX PRO 2 4P4 7027.080-5M	STA STA1 STU-S	8370	57,2	146	8788	50,6	50
MX PRO 2 4P4 7027.090-5M		9350	64,1	145	9841	57,2	50
MX PRO 2 4P4 7027.100-5M		10310	71,1	145	10883	63,8	50
MX PRO 2 4P4 7027.120-5M		12170	85,3	142	12933	77,2	50
MX PRO 2 4P4 7027.140-5M		13980	100	139	14938	90,7	50
MX PRO 2 4P4 7027.160-5M		15720	115	136	16899	104	50
MX PRO 2 4P4 7027.180-5M		17400	131	132	18816	118	50
MX PRO 2 4P4 7027.200-5M		19030	148	128	20687	132	35
MX PRO 2 4P4 7027.080-6M		10040	68,4	146	10546	60,8	50
MX PRO 2 4P4 7027.090-6M		11210	76,7	146	11809	68,6	50
MX PRO 2 4P4 7027.100-6M		12350	85,1	145	13059	76,6	50
MX PRO 2 4P4 7027.120-6M		14570	102	142	15520	92,6	50
MX PRO 2 4P4 7027.140-6M		16700	120	139	17926	109	50
MX PRO 2 4P4 7027.160-6M		18760	138	135	20279	125	50
MX PRO 2 4P4 7027.180-6M		20740	158	131	22579	142	50
MX PRO 2 4P4 7027.200-6M		22640	178	127	24824	159	35
MX PRO 2 4P4 7027.080-7M		11760	79,7	147	12303	70,9	50
MX PRO 2 4P4 7027.090-7M		13100	89,8	145	13777	80,1	50
MX PRO 2 4P4 7027.100-7M		14410	100	144	15236	89,4	50
MX PRO 2 4P4 7027.120-7M		16930	121	139	18106	108	50
MX PRO 2 4P4 7027.140-7M		19340	142	136	20914	127	50
MX PRO 2 4P4 7027.160-7M		21670	164	132	23659	146	50
MX PRO 2 4P4 7027.180-7M		23940	185	129	26342	166	35
MX PRO 2 4P4 7027.200-7M		26170	207	126	28962	185	35
MX PRO 2 4P4 7027.080-8M		13440	92	146	14061	81	50
MX PRO 2 4P4 7027.090-8M		14960	103	145	15746	91,5	50
MX PRO 2 4P4 7027.100-8M		16430	114	144	17413	102	50
MX PRO 2 4P4 7027.120-8M		19250	137	140	20693	123	50
MX PRO 2 4P4 7027.140-8M		21940	160	137	23902	145	50
MX PRO 2 4P4 7027.160-8M		24550	185	132	27039	167	50

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7027.180-8M		27100	210	129	30105	189	35
MX PRO 2 4P4 7027.200-8M		29640	238	124	33099	212	35
MX PRO 2 4P4 7027.080-9M		15120	104	145	15819	91,1	50
MX PRO 2 4P4 7027.090-9M		16820	116	145	17714	103	50
MX PRO 2 4P4 7027.100-9M		18480	129	143	19589	115	50
MX PRO 2 4P4 7027.120-9M		21650	155	139	23279	139	50
MX PRO 2 4P4 7027.140-9M		24690	181	136	26889	163	50
MX PRO 2 4P4 7027.160-9M		27620	208	132	30419	188	35
MX PRO 2 4P4 7027.180-9M		30490	237	128	33868	213	35
MX PRO 2 4P4 7027.200-9M		33340	267	124	37237	238	35
MX PRO 2 4P4 7027.080-5M		8560	57,2	149	8788	50,6	50
MX PRO 2 4P4 7027.090-5M		9560	64,1	149	9841	57,2	50
MX PRO 2 4P4 7027.100-5M		10540	71,1	148	10883	63,8	50
MX PRO 2 4P4 7027.120-5M		12450	85,3	145	12933	77,2	50
MX PRO 2 4P4 7027.140-5M		14300	100	143	14938	90,7	50
MX PRO 2 4P4 7027.160-5M		16090	115	139	16899	104	50
MX PRO 2 4P4 7027.180-5M		17810	131	135	18816	118	50
MX PRO 2 4P4 7027.200-5M		19470	148	131	20687	132	35
MX PRO 2 4P4 7027.080-6M		10270	68,4	150	10546	60,8	50
MX PRO 2 4P4 7027.090-6M		11470	76,7	149	11809	68,6	50
MX PRO 2 4P4 7027.100-6M		12640	85,1	148	13059	76,6	50
MX PRO 2 4P4 7027.120-6M		14910	102	146	15520	92,6	50
MX PRO 2 4P4 7027.140-6M		17090	120	142	17926	109	50
MX PRO 2 4P4 7027.160-6M		19190	138	139	20279	125	50
MX PRO 2 4P4 7027.180-6M		21220	158	134	22579	142	50
MX PRO 2 4P4 7027.200-6M		23170	178	130	24824	159	35
MX PRO 2 4P4 7027.080-7M		12020	79,7	150	12303	70,9	50
MX PRO 2 4P4 7027.090-7M		13390	89,8	149	13777	80,1	50
MX PRO 2 4P4 7027.100-7M	SV	14730	100	147	15236	89,4	50
MX PRO 2 4P4 7027.120-7M	STU-M	17320	121	143	18106	108	50
MX PRO 2 4P4 7027.140-7M	STE-M	19790	142	139	20914	127	50
MX PRO 2 4P4 7027.160-7M	STW	22180	164	135	23659	146	50
MX PRO 2 4P4 7027.180-7M		24500	185	132	26342	166	35
MX PRO 2 4P4 7027.200-7M		26780	207	129	28962	185	35
MX PRO 2 4P4 7027.080-8M		13750	92	149	14061	81	50
MX PRO 2 4P4 7027.090-8M		15300	103	148	15746	91,5	50
MX PRO 2 4P4 7027.100-8M		16800	114	147	17413	102	50
MX PRO 2 4P4 7027.120-8M		19690	137	143	20693	123	50
MX PRO 2 4P4 7027.140-8M		22450	160	140	23902	145	50
MX PRO 2 4P4 7027.160-8M		25110	185	135	27039	167	50
MX PRO 2 4P4 7027.180-8M		27720	210	132	30105	189	35
MX PRO 2 4P4 7027.200-8M		30310	238	127	33099	212	35
MX PRO 2 4P4 7027.080-9M		15460	104	148	15819	91,1	50
MX PRO 2 4P4 7027.090-9M		17210	116	148	17714	103	50
MX PRO 2 4P4 7027.100-9M		18900	129	146	19589	115	50
MX PRO 2 4P4 7027.120-9M		22150	155	142	23279	139	50
MX PRO 2 4P4 7027.140-9M		25250	181	139	26889	163	50
MX PRO 2 4P4 7027.160-9M		28250	208	135	30419	188	35
MX PRO 2 4P4 7027.180-9M		31190	237	131	33868	213	35
MX PRO 2 4P4 7027.200-9M		34100	267	127	37237	238	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

MX PRO 2 4P4 2200K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7022.080-5M	S05 S07 STE-S	7450	57,2	130	7909	50,6	50
MX PRO 2 4P4 7022.090-5M		8320	64,1	129	8857	57,2	50
MX PRO 2 4P4 7022.100-5M		9170	71,1	128	9795	63,8	50
MX PRO 2 4P4 7022.120-5M		10830	85,3	126	11640	77,2	50
MX PRO 2 4P4 7022.140-5M		12430	100	124	13445	90,7	50
MX PRO 2 4P4 7022.160-5M		13980	115	121	15209	104	50
MX PRO 2 4P4 7022.180-5M		15480	131	118	16934	118	50
MX PRO 2 4P4 7022.200-5M		16930	148	114	18618	132	35
MX PRO 2 4P4 7022.080-6M		8940	68,4	130	9491	60,8	50
MX PRO 2 4P4 7022.090-6M		9980	76,7	130	10628	68,6	50
MX PRO 2 4P4 7022.100-6M		10990	85,1	129	11753	76,6	50
MX PRO 2 4P4 7022.120-6M		12970	102	127	13968	92,6	50
MX PRO 2 4P4 7022.140-6M		14860	120	123	16134	109	50
MX PRO 2 4P4 7022.160-6M		16690	138	120	18251	125	50
MX PRO 2 4P4 7022.180-6M		18450	158	116	20321	142	50
MX PRO 2 4P4 7022.200-6M		20140	178	113	22342	159	35
MX PRO 2 4P4 7022.080-7M		10460	79,7	131	11073	70,9	50
MX PRO 2 4P4 7022.090-7M		11650	89,8	129	12400	80,1	50
MX PRO 2 4P4 7022.100-7M		12810	100	128	13712	89,4	50
MX PRO 2 4P4 7022.120-7M		15060	121	124	16296	108	50
MX PRO 2 4P4 7022.140-7M		17210	142	121	18822	127	50
MX PRO 2 4P4 7022.160-7M		19290	164	117	21293	146	50
MX PRO 2 4P4 7022.180-7M		21310	185	115	23708	166	35
MX PRO 2 4P4 7022.200-7M		23290	207	112	26066	185	35
MX PRO 2 4P4 7022.080-8M		11960	92	130	12655	81	50
MX PRO 2 4P4 7022.090-8M		13300	103	129	14171	91,5	50
MX PRO 2 4P4 7022.100-8M		14610	114	128	15671	102	50
MX PRO 2 4P4 7022.120-8M		17120	137	124	18623	123	50
MX PRO 2 4P4 7022.140-8M		19520	160	122	21511	145	50
MX PRO 2 4P4 7022.160-8M		21840	185	118	24335	167	50
MX PRO 2 4P4 7022.180-8M		24110	210	114	27094	189	35
MX PRO 2 4P4 7022.200-8M		26370	238	110	29789	212	35
MX PRO 2 4P4 7022.080-9M		13450	104	129	14237	91,1	50
MX PRO 2 4P4 7022.090-9M		14960	116	128	15942	103	50
MX PRO 2 4P4 7022.100-9M		16430	129	127	17630	115	50
MX PRO 2 4P4 7022.120-9M		19260	155	124	20951	139	50
MX PRO 2 4P4 7022.140-9M		21960	181	121	24200	163	50
MX PRO 2 4P4 7022.160-9M		24570	208	118	27377	188	35
MX PRO 2 4P4 7022.180-9M		27120	237	114	30481	213	35
MX PRO 2 4P4 7022.200-9M		29660	267	111	33513	238	35
MX PRO 2 4P4 7022.080-5M	STA STA1 STU-S	7530	57,2	131	7909	50,6	50
MX PRO 2 4P4 7022.090-5M		8410	64,1	131	8857	57,2	50
MX PRO 2 4P4 7022.100-5M		9270	71,1	130	9795	63,8	50
MX PRO 2 4P4 7022.120-5M		10960	85,3	128	11640	77,2	50
MX PRO 2 4P4 7022.140-5M		12580	100	125	13445	90,7	50
MX PRO 2 4P4 7022.160-5M		14150	115	123	15209	104	50
MX PRO 2 4P4 7022.180-5M		15660	131	119	16934	118	50
MX PRO 2 4P4 7022.200-5M		17120	148	115	18618	132	35
MX PRO 2 4P4 7022.080-6M		9040	68,4	132	9491	60,8	50
MX PRO 2 4P4 7022.090-6M		10080	76,7	131	10628	68,6	50
MX PRO 2 4P4 7022.100-6M		11110	85,1	130	11753	76,6	50
MX PRO 2 4P4 7022.120-6M		13110	102	128	13968	92,6	50
MX PRO 2 4P4 7022.140-6M		15030	120	125	16134	109	50
MX PRO 2 4P4 7022.160-6M		16880	138	122	18251	125	50
MX PRO 2 4P4 7022.180-6M		18660	158	118	20321	142	50
MX PRO 2 4P4 7022.200-6M		20380	178	114	22342	159	35
MX PRO 2 4P4 7022.080-7M		10590	79,7	132	11073	70,9	50
MX PRO 2 4P4 7022.090-7M		11790	89,8	131	12400	80,1	50
MX PRO 2 4P4 7022.100-7M		12970	100	129	13712	89,4	50
MX PRO 2 4P4 7022.120-7M		15240	121	125	16296	108	50
MX PRO 2 4P4 7022.140-7M		17410	142	122	18822	127	50
MX PRO 2 4P4 7022.160-7M		19500	164	118	21293	146	50
MX PRO 2 4P4 7022.180-7M		21550	185	116	23708	166	35
MX PRO 2 4P4 7022.200-7M		23550	207	113	26066	185	35
MX PRO 2 4P4 7022.080-8M		12100	92	131	12655	81	50
MX PRO 2 4P4 7022.090-8M		13460	103	130	14171	91,5	50
MX PRO 2 4P4 7022.100-8M		14780	114	129	15671	102	50
MX PRO 2 4P4 7022.120-8M		17320	137	126	18623	123	50
MX PRO 2 4P4 7022.140-8M		19750	160	123	21511	145	50
MX PRO 2 4P4 7022.160-8M		22090	185	119	24335	167	50

AEC Illuminazione

www.aecilluminazione.it - www.aecilluminazione.com

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 2 4P4 7022.180-8M		24390	210	116	27094	189	35
MX PRO 2 4P4 7022.200-8M		26670	238	112	29789	212	35
MX PRO 2 4P4 7022.080-9M		13610	104	130	14237	91,1	50
MX PRO 2 4P4 7022.090-9M		15140	116	130	15942	103	50
MX PRO 2 4P4 7022.100-9M		16630	129	128	17630	115	50
MX PRO 2 4P4 7022.120-9M		19490	155	125	20951	139	50
MX PRO 2 4P4 7022.140-9M		22220	181	122	24200	163	50
MX PRO 2 4P4 7022.160-9M		24860	208	119	27377	188	35
MX PRO 2 4P4 7022.180-9M		27440	237	115	30481	213	35
MX PRO 2 4P4 7022.200-9M		30000	267	112	33513	238	35
MX PRO 2 4P4 7022.080-5M		7700	57,2	134	7909	50,6	50
MX PRO 2 4P4 7022.090-5M		8600	64,1	134	8857	57,2	50
MX PRO 2 4P4 7022.100-5M		9490	71,1	133	9795	63,8	50
MX PRO 2 4P4 7022.120-5M		11210	85,3	131	11640	77,2	50
MX PRO 2 4P4 7022.140-5M		12870	100	128	13445	90,7	50
MX PRO 2 4P4 7022.160-5M		14480	115	125	15209	104	50
MX PRO 2 4P4 7022.180-5M		16030	131	122	16934	118	50
MX PRO 2 4P4 7022.200-5M		17520	148	118	18618	132	35
MX PRO 2 4P4 7022.080-6M		9250	68,4	135	9491	60,8	50
MX PRO 2 4P4 7022.090-6M		10320	76,7	134	10628	68,6	50
MX PRO 2 4P4 7022.100-6M		11370	85,1	133	11753	76,6	50
MX PRO 2 4P4 7022.120-6M		13420	102	131	13968	92,6	50
MX PRO 2 4P4 7022.140-6M		15380	120	128	16134	109	50
MX PRO 2 4P4 7022.160-6M		17270	138	125	18251	125	50
MX PRO 2 4P4 7022.180-6M		19090	158	120	20321	142	50
MX PRO 2 4P4 7022.200-6M		20850	178	117	22342	159	35
MX PRO 2 4P4 7022.080-7M		10820	79,7	135	11073	70,9	50
MX PRO 2 4P4 7022.090-7M		12060	89,8	134	12400	80,1	50
MX PRO 2 4P4 7022.100-7M	SV	13260	100	132	13712	89,4	50
MX PRO 2 4P4 7022.120-7M	STU-M	15580	121	128	16296	108	50
MX PRO 2 4P4 7022.140-7M	STE-M	17810	142	125	18822	127	50
MX PRO 2 4P4 7022.160-7M	STW	19960	164	121	21293	146	50
MX PRO 2 4P4 7022.180-7M		22050	185	119	23708	166	35
MX PRO 2 4P4 7022.200-7M		24100	207	116	26066	185	35
MX PRO 2 4P4 7022.080-8M		12370	92	134	12655	81	50
MX PRO 2 4P4 7022.090-8M		13770	103	133	14171	91,5	50
MX PRO 2 4P4 7022.100-8M		15120	114	132	15671	102	50
MX PRO 2 4P4 7022.120-8M		17720	137	129	18623	123	50
MX PRO 2 4P4 7022.140-8M		20200	160	126	21511	145	50
MX PRO 2 4P4 7022.160-8M		22600	185	122	24335	167	50
MX PRO 2 4P4 7022.180-8M		24950	210	118	27094	189	35
MX PRO 2 4P4 7022.200-8M		27280	238	114	29789	212	35
MX PRO 2 4P4 7022.080-9M		13920	104	133	14237	91,1	50
MX PRO 2 4P4 7022.090-9M		15490	116	133	15942	103	50
MX PRO 2 4P4 7022.100-9M		17010	129	131	17630	115	50
MX PRO 2 4P4 7022.120-9M		19930	155	128	20951	139	50
MX PRO 2 4P4 7022.140-9M		22730	181	125	24200	163	50
MX PRO 2 4P4 7022.160-9M		25430	208	122	27377	188	35
MX PRO 2 4P4 7022.180-9M		28070	237	118	30481	213	35
MX PRO 2 4P4 7022.200-9M		30690	267	114	33513	238	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.